

- 316L# SS housing
- 3mm toughened glass diffuser
- CE/SAA/IP20/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20** **COLOR**
SDRASSM151520 MIRRORED
SDRASSB151520 BRUSHED

POWER: 1x15/20W

- **CODE - IP20** **COLOR**
SDRASSM152020 MIRRORED
SDRASSB152020 BRUSHED

POWER: 1x15/20/30W

- **CODE - IP20** **COLOR**
SDRASSM153020 MIRRORED
SDRASSB153020 BRUSHED

POWER: 1x15/20/30W

- **CODE - IP65** **COLOR**
SDRASSM151565 MIRRORED
SDRASSB151565 BRUSHED




POWER: 1x15/20W

- **CODE - IP65** **COLOR**
SDRASSM152065 MIRRORED
SDRASSB152065 BRUSHED




POWER: 1x15/20/30W

- **CODE - IP65** **COLOR**
SDRASSM153065 MIRRORED
SDRASSB153065 BRUSHED

POWER: 1x15/20/30W

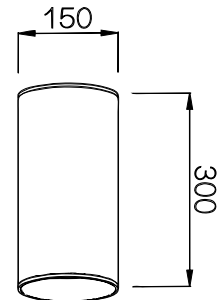

• **PHOTOMETRIC [Unit: cd]**

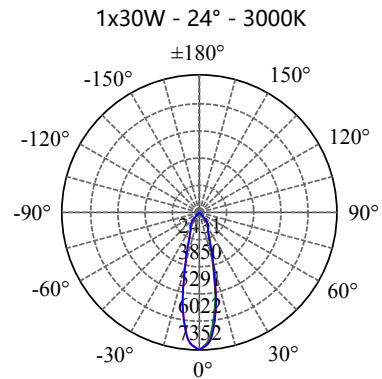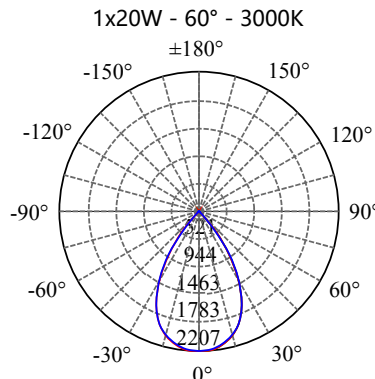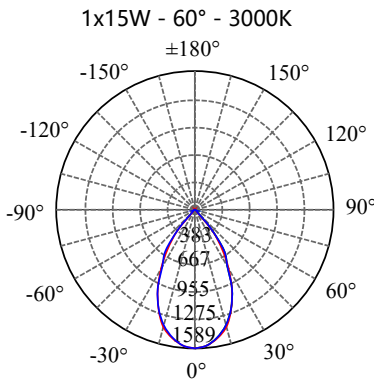

• **PERFORMANCE**

- 1x15W - 36V - 350mA - 1723lm
- 1x20W - 36V - 500mA - 2335lm
- 1x30W - 36V - 750mA - 3508lm