



- 316L# SS housing
- 4mm thick PMMA diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3 years

- **CODE - IP65** **COLOR**
 BLRFLSSM1560 MIRRORED
 BLRFLSSB1560 BRUSHED


POWER: 1x15/20W

- **CODE - IP65** **COLOR**
 BLRFLSSM15100 MIRRORED
 BLRFLSSB15100 BRUSHED

POWER: 1x15/20W

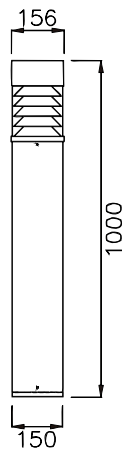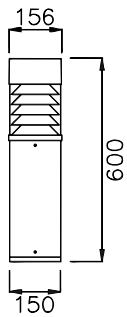

• **PHOTOMETRIC [Unit: cd]**

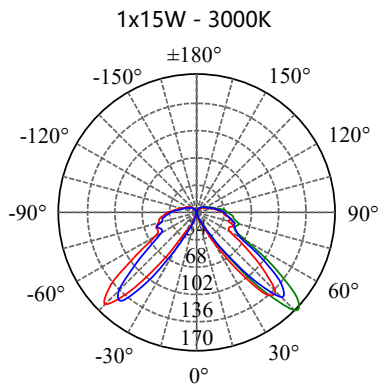

• **PERFORMANCE**

- 1x15W - 36V - 350mA - 872lm
- 1x20W - 36V - 500mA - 1165lm