
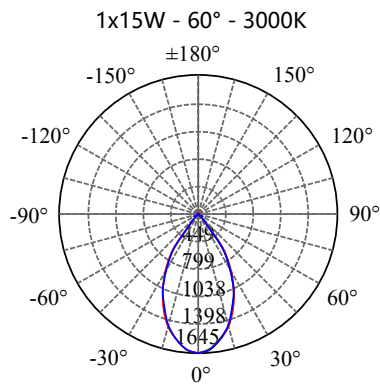
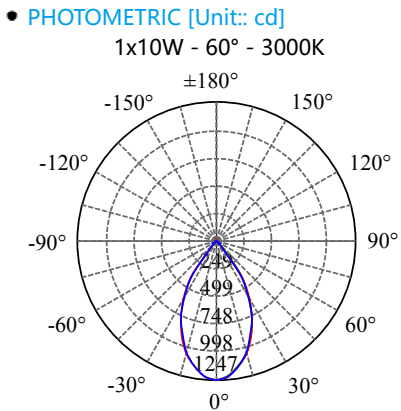


- 316L# SS housing
- 3mm toughened glass diffuser
- Cut out : Φ 110-115mm
- CE/SAA/IP20/IP65
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI \geq 80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20** **COLOR**
DLRADJSSM12151520 MIRRORED
DLRADJSSB12151520 BRUSHED
POWER: 1x10/15/18W

- **CODE - IP65** **COLOR**
DLRADJSSM12151565 MIRRORED
DLRADJSSB12151565 BRUSHED
POWER: 1x10/15/18W

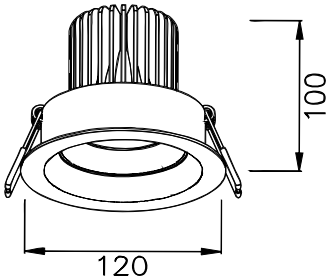

- **PERFORMANCE**
1x10W - 36V - 250mA - 1152lm
1x15W - 36V - 350mA - 1725lm
1x18W - 36V - 450mA - 2067lm