




- 316L# SS housing
- 3mm toughened glass diffuser
- Cut out :  $\Phi 70$ -75mm
- CE/SAA/IP20/IP65
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI $\geq$ 80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20**      **COLOR**  
DLRSSM08121220    MIRRORED  
DLRSSB08121220    BRUSHED  
**POWER:** 1x5/10W

- **CODE - IP65**      **COLOR**  
DLRSSM08121265    MIRRORED  
DLRSSB08121265    BRUSHED  
**POWER:** 1x5/10W

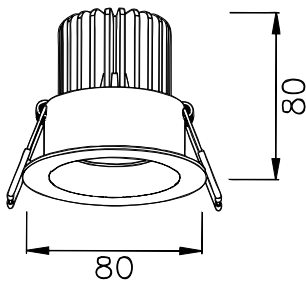

• **PHOTOMETRIC [Unit:: cd]**

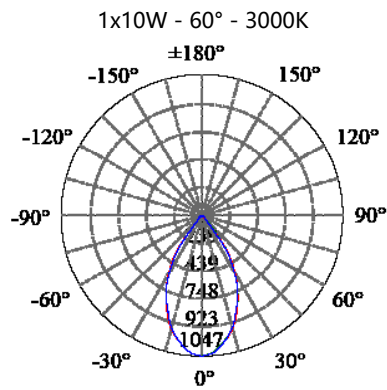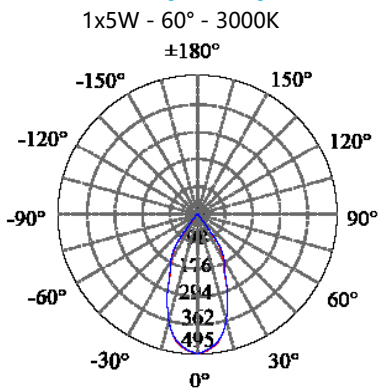

• **PERFORMANCE**

- 1x5W - 36V - 150mA - 554lm
- 1x10W - 36V - 250mA - 1112lm