

- 316L# SS housing
- 3mm toughened glass diffuser
- CE/SAA/IP20/IP65/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20** **COLOR**
SDRASSM081220 MIRRORED
SDRASSB081220 BRUSHED
- POWER:** 1x5/10W




- **CODE - IP20** **COLOR**
SDRASSM081520 MIRRORED
SDRASSB081520 BRUSHED
- POWER:** 1x5/10W

- **CODE - IP20** **COLOR**
SDRASSM082020 MIRRORED
SDRASSB082020 BRUSHED
- POWER:** 1x5/10W



- **CODE - IP65** **COLOR**
SDRASSM081265 MIRRORED
SDRASSB081265 BRUSHED
- POWER:** 1x5/10W

- **CODE - IP65** **COLOR**
SDRASSM081565 MIRRORED
SDRASSB081565 BRUSHED
- POWER:** 1x5/10W

- **CODE - IP65** **COLOR**
SDRASSM082065 MIRRORED
SDRASSB082065 BRUSHED
- POWER:** 1x5/10W

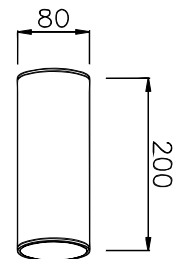

• **PHOTOMETRIC [Unit: cd]**

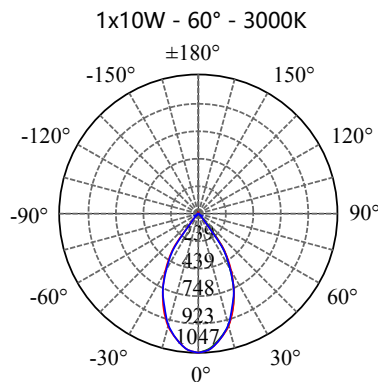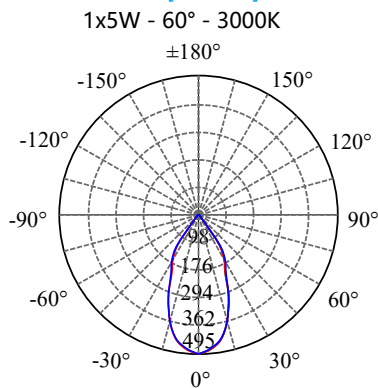

• **PERFORMANCE**

- 1x5W - 36V - 150mA - 554lm
- 1x10W - 36V - 250mA - 1112lm