

- 316L# SS housing
- 3mm toughened glass diffuser
- CE/SAA/IP20/IP65/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI $\geq$ 80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20** **COLOR**
SDRASSM101220 MİRRORED
SDRASSB101220 BRUSHED

POWER: 1x5/10W

- **CODE - IP20** **COLOR**
SDRASSM101520 MİRRORED
SDRASSB101520 BRUSHED

POWER: 1x5/10/15W

- **CODE - IP20** **COLOR**
SDRASSM102020 MİRRORED
SDRASSB102020 BRUSHED

POWER: 1x5/10/15W

- **CODE - IP65** **COLOR**
SDRASSM101265 MİRRORED
SDRASSB101265 BRUSHED




POWER: 1x5/10W

- **CODE - IP65** **COLOR**
SDRASSM101565 MİRRORED
SDRASSB101565 BRUSHED




POWER: 1x5/10/15W

- **CODE - IP65** **COLOR**
SDRASSM102065 MİRRORED
SDRASSB102065 BRUSHED

POWER: 1x5/10/15W



• **PHOTOMETRIC [Unit: cd]**

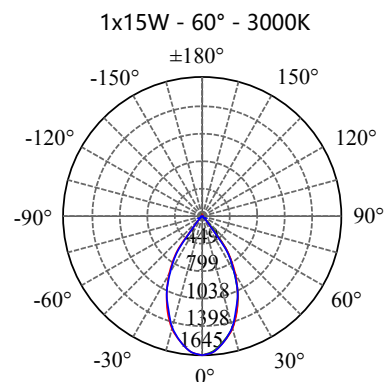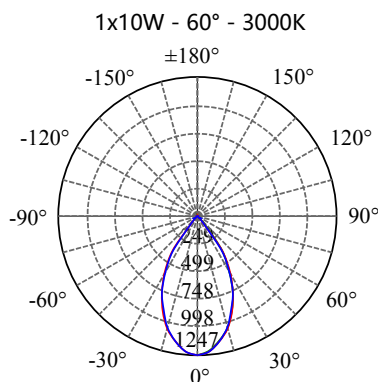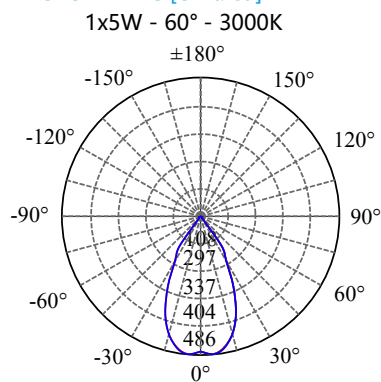

• **PERFORMANCE**

1x5W - 36V - 150mA - 577lm
1x10W - 36V - 250mA - 1152lm
1x15W - 36V - 350mA - 1725lm