

- 316L# SS Housing
- 8mm thick toughened FLUSH glass diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP65** **COLOR**
- UDRSSM15152 MIRRORED
- UDRSSB15152 BRUSHED

POWER: 2x15/20W

- **CODE - IP65** **COLOR**
- UDRSSM15202 MIRRORED
- UDRSSB15202 BRUSHED

POWER: 2x15/20/30W

- **CODE - IP65** **COLOR**
- UDRSSM15302 MIRRORED
- UDRSSB15302 BRUSHED

POWER: 2x15/20/30W

- **CODE - IP65** **COLOR**
- UDRSSM15151 MIRRORED
- UDRSSB15151 BRUSHED




POWER: 1x15/20/30W

- **CODE - IP65** **COLOR**
- UDRSSM15201 MIRRORED
- UDRSSB15201 BRUSHED




POWER: 1x15/20/30W

- **CODE - IP65** **COLOR**
- UDRSSM15301 MIRRORED
- UDRSSB15301 BRUSHED

POWER: 1x15/20/30W



• **PHOTOMETRIC [Unit:: cd]**

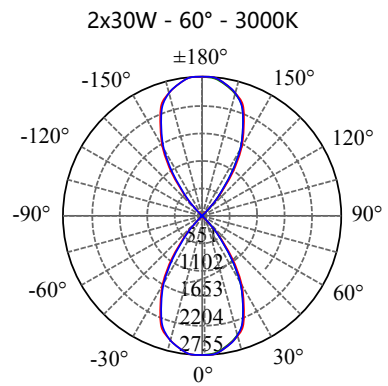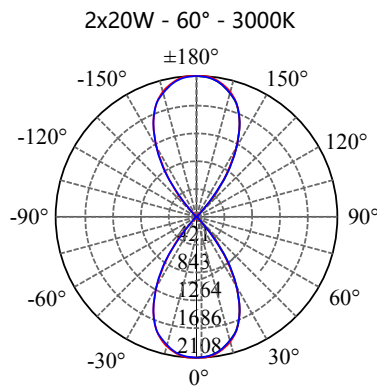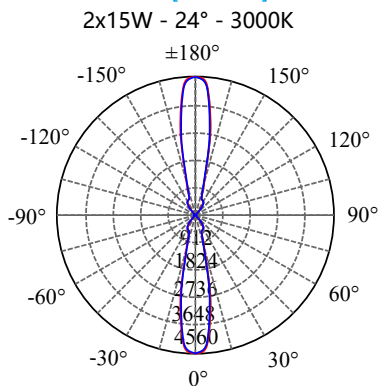

• **PERFORMANCE**

2x15W - 36V - 750mA - 3053lm
 2x20W - 36V - 1050mA - 4075lm
 2x30W - 36V - 1500mA - 6163lm

1x15W - 36V - 350mA - 1556lm
 1x20W - 36V - 500mA - 2039m
 1x30W - 36V - 750mA - 3058lm