

- 316L# SS Housing
- 8mm thick toughened FLUSH glass diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP65** **COLOR**
 UDRSSM08102 MIRRORRED
 UDRSSB08102 BRUSHED
 POWER: 2x5/8W




- **CODE - IP65** **COLOR**
 UDRSSM08152 MIRRORRED
 UDRSSB08152 BRUSHED
 POWER: 2x5/8W

- **CODE - IP65** **COLOR**
 UDRSSM08202 MIRRORRED
 UDRSSB08202 BRUSHED
 POWER: 2x5/8W



- **CODE - IP65** **COLOR**
 UDRSSM08101 MIRRORRED
 UDRSSB08101 BRUSHED
 POWER: 1x5/10W

- **CODE - IP65** **COLOR**
 UDRSSM08151 MIRRORRED
 UDRSSB08151 BRUSHED
 POWER: 1x5/10W

- **CODE - IP65** **COLOR**
 UDRSSM08201 MIRRORRED
 UDRSSB08201 BRUSHED
 POWER: 1x5/10W

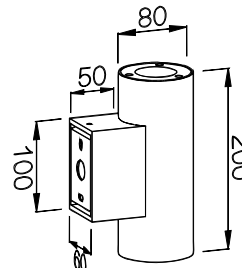

• **PHOTOMETRIC [Unit: cd]**

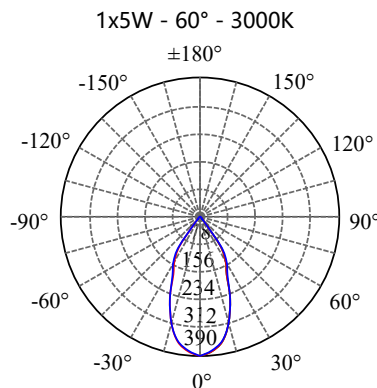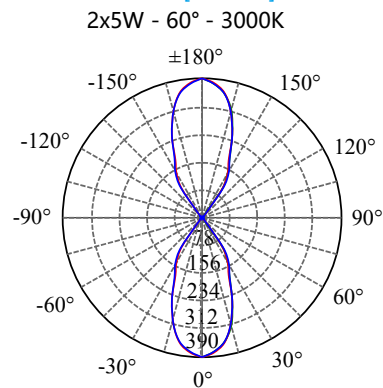

• **PERFORMANCE**

- 2x5W - 36V - 250mA - 886lm
- 2x8W - 36V - 350mA - 1367lm
- 1x5W - 36V - 150mA - 425lm
- 1x10W - 36V - 250mA - 882lm