

- 316L# SS Housing
- 3mm toughened glass diffuser
- CE/SAA/IP20/IP65/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20** **COLOR**
- PDRASSM101520 MIRRORED
- PDRASSB101520 BRUSHED
- POWER: 1x5/10/15W**






- **CODE - IP20** **COLOR**
- PDRASSM102020 MIRRORED
- PDRASSB102020 BRUSHED
- POWER: 1x5/10/15W**

- **CODE - IP20** **COLOR**
- PDRASSM103020 MIRRORED
- PDRASSB103020 BRUSHED
- POWER: 1x5/10/15W**

- **CODE - IP65** **COLOR**
- PDRASSM101565 MIRRORED
- PDRASSB101565 BRUSHED
- POWER: 1x5/10/15W**

- **CODE - IP65** **COLOR**
- PDRASSM102065 MIRRORED
- PDRASSB102065 BRUSHED
- POWER: 1x5/10/15W**

- **CODE - IP65** **COLOR**
- PDRASSM103065 MIRRORED
- PDRASSB103065 BRUSHED
- POWER: 1x5/10/15W**

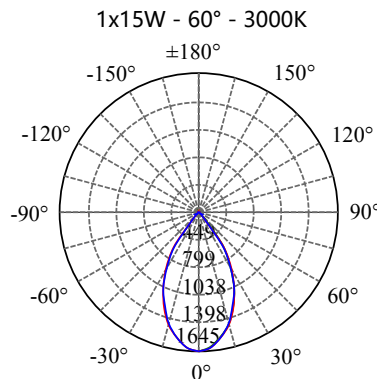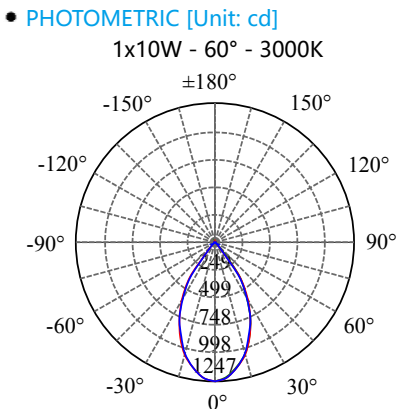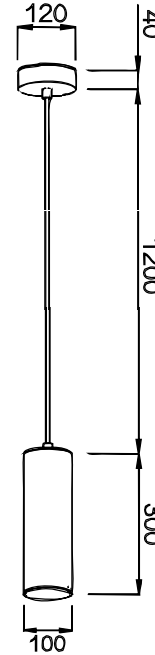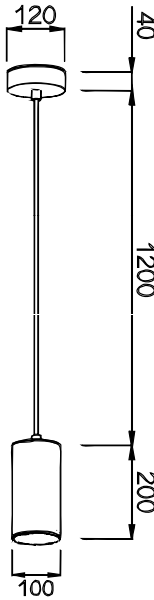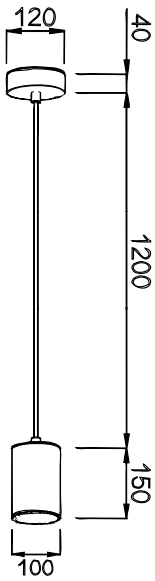

- **PERFORMANCE**
- 1x5W - 36V - 150mA - 577lm
- 1x10W - 36V - 250mA - 1152lm
- 1x15W - 36V - 350mA - 1725lm