

- 316L# SS Housing
- 3mm toughened glass diffuser
- CE/SAA/IP20/IP65/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20**      **COLOR**
- PDRASSM121520    MIRRORED
- PDRASSB121520    BRUSHED

POWER: 1x10/15/20W

- **CODE - IP20**      **COLOR**
- PDRASSM122020    MIRRORED
- PDRASSB122020    BRUSHED

POWER: 1x10/15/20W

- **CODE - IP20**      **COLOR**
- PDRASSM124020    MIRRORED
- PDRASSB124020    BRUSHED

POWER: 1x10/15/20W

- **CODE - IP65**      **COLOR**
- PDRASSM121565    MIRRORED
- PDRASSB121565    BRUSHED




POWER: 1x10/15/20W

- **CODE - IP65**      **COLOR**
- PDRASSM122065    MIRRORED
- PDRASSB122065    BRUSHED


POWER: 1x10/15/20W

- **CODE - IP65**      **COLOR**
- PDRASSM124065    MIRRORED
- PDRASSB124065    BRUSHED


POWER: 1x10/15/20W

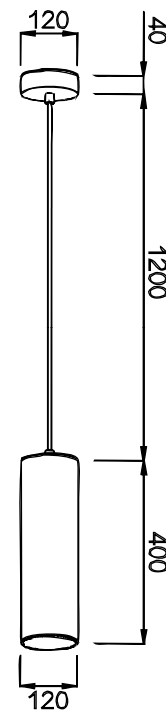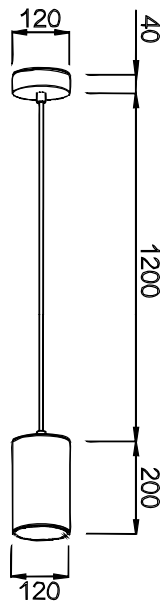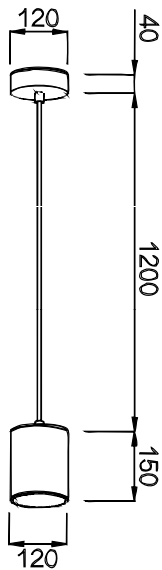

- **PHOTOMETRIC [Unit: cd]**
- 1x20W - 60° - 3000K

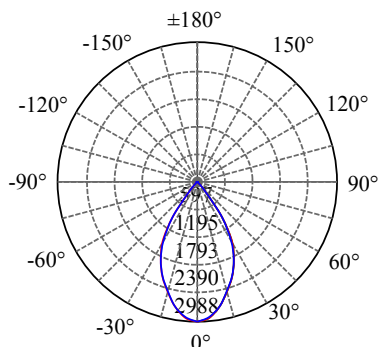

- 1x20W - 36° - 3000K

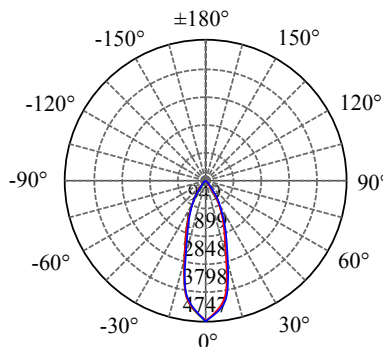

- **PERFORMANCE**
- 1x10W - 36V - 250mA - 1182lm
- 1x15W - 36V - 350mA - 1743lm
- 1x20W - 36V - 500mA - 2385lm