








- 316L# SS housing
- 3mm toughened glass diffuser
- CE/SAA/IP20/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20** **COLOR**
 UDRASSM15202 MIRRORED
 UDRASSB15202 BRUSHED
 POWER: 2x15/20W

- **CODE - IP20** **COLOR**
 UDRASSM15302 MIRRORED
 UDRASSB15302 BRUSHED
 POWER: 2x15/20/30W

- **CODE - IP20** **COLOR**
 UDRASSM15201 MIRRORED
 UDRASSB15201 BRUSHED
 POWER: 1x15/20/30W

- **CODE - IP20** **COLOR**
 UDRASSM15301 MIRRORED
 UDRASSB15301 BRUSHED
 POWER: 1x15/20/30W

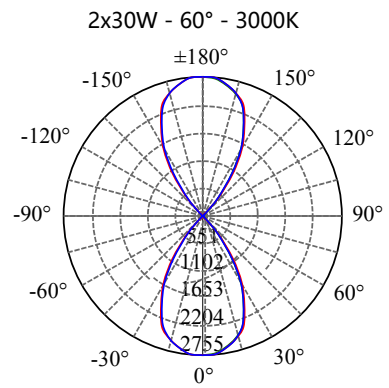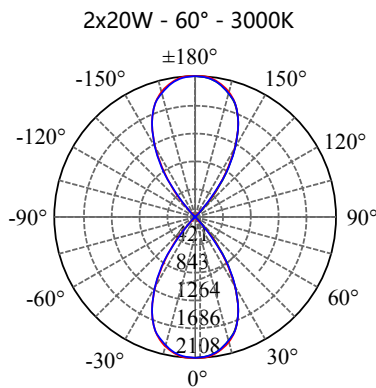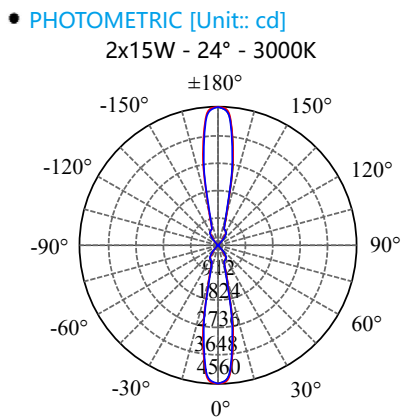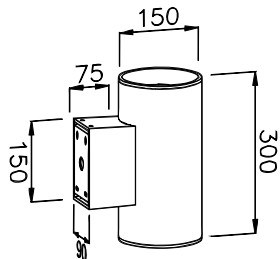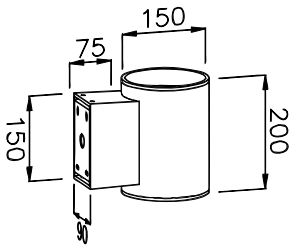

- **PERFORMANCE**
 2x15W - 36V - 750mA - 3438lm
 2x20W - 36V - 1050mA - 4668lm
 2x30W - 36V - 1500mA - 7055lm

- 1x15W - 36V - 350mA - 1723lm
 1x20W - 36V - 500mA - 2335lm
 1x30W - 36V - 750mA - 3508lm