





- 316L# SS housing
- 3mm toughened glass diffuser
- CE/SAA/IP20/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20** **COLOR**
 UDRASSM10152 MIRRORED
 UDRASSB10152 BRUSHED
 POWER: 2x5/8W

- **CODE - IP20** **COLOR**
 UDRASSM10202 MIRRORED
 UDRASSB10202 BRUSHED
 POWER: 2x5/8W

- **CODE - IP20** **COLOR**
 UDRASSM10151 MIRRORED
 UDRASSB10151 BRUSHED
 POWER: 1x5/10/15W

- **CODE - IP20** **COLOR**
 UDRASSM10201 MIRRORED
 UDRASSB10201 BRUSHED
 POWER: 1x5/10/15W

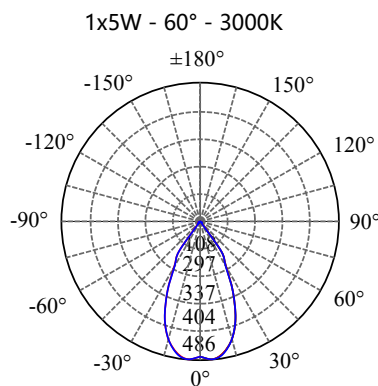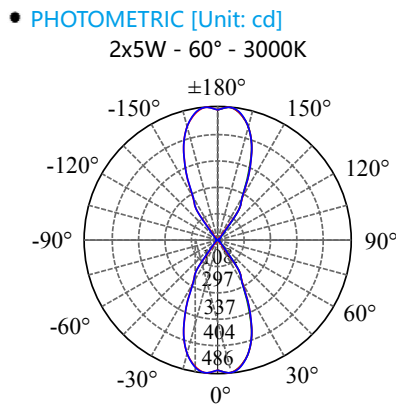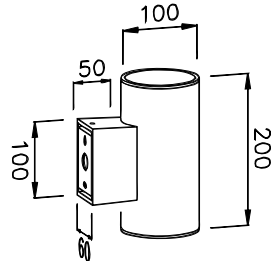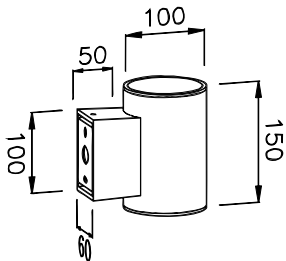

- **PERFORMANCE**
 1x5W - 36V - 150mA - 577lm
 1x10W - 36V - 250mA - 1152lm
 1x15W - 36V - 350mA - 1725lm

- 2x5W - 36V - 250mA - 1175lm
 2x8W - 36V - 350mA - 1757lm