



- 316L# SS Housing
- 3mm toughened glass diffuser
- CE/SAA/IP20/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20**      **COLOR**  
 UDRASSM08152    MIRRORED  
 UDRASSB08152    BRUSHED  
 POWER: 2x5/8W


- **CODE - IP20**      **COLOR**  
 UDRASSM08202    MIRRORED  
 UDRASSB08202    BRUSHED  
 POWER: 2x5/8W

- **CODE - IP20**      **COLOR**  
 UDRASSM08151    MIRRORED  
 UDRASSB08151    BRUSHED  
 POWER: 1x5/10W


- **CODE - IP20**      **COLOR**  
 UDRASSM08201    MIRRORED  
 UDRASSB08201    BRUSHED  
 POWER: 1x5/10W

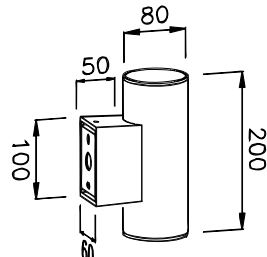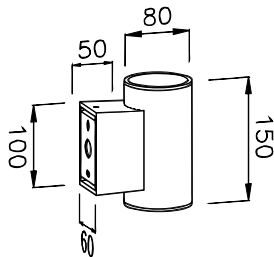

- **PHOTOMETRIC [Unit: cd]**  
 2x5W - 60° - 3000K

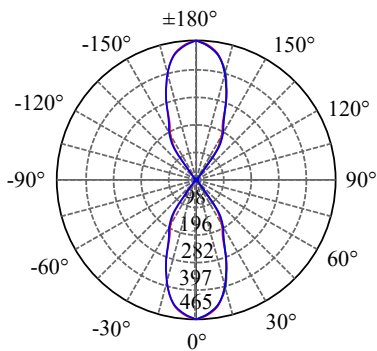

- 1x5W - 60° - 3000K

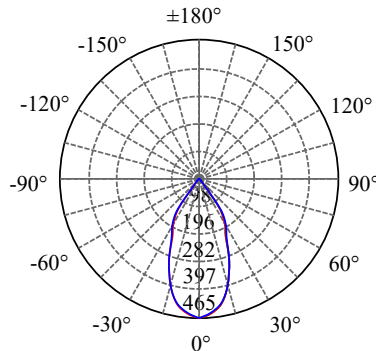

- **PERFORMANCE**  
 2x5W - 36V - 250mA - 1145lm  
 2x8W - 36V - 350mA - 1711lm  
 1x5W - 36V - 150mA - 554lm  
 1x10W - 36V - 250mA - 1112lm