

- 316L# SS housing
- 3mm toughened glass diffuser
- CE/SAA/IP20/IP65/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20** **COLOR**
SDRASSM121520 MIRRORED
SDRASSB121520 BRUSHED

POWER: 1x10/15/20W

- **CODE - IP20** **COLOR**
SDRASSM122020 MIRRORED
SDRASSB122020 BRUSHED



POWER: 1x10/15/20W

- **CODE - IP65** **COLOR**
SDRASSM121565 MIRRORED
SDRASSB121565 BRUSHED



POWER: 1x10/15/20W

- **CODE - IP65** **COLOR**
SDRASSM122065 MIRRORED
SDRASSB122065 BRUSHED

POWER: 1x10/15/20W

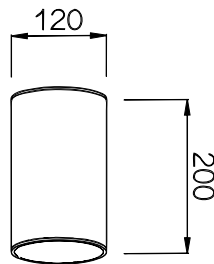

• **PHOTOMETRIC [Unit: cd]**

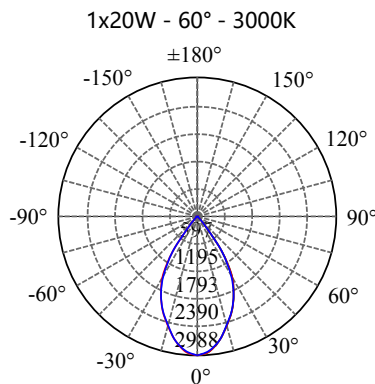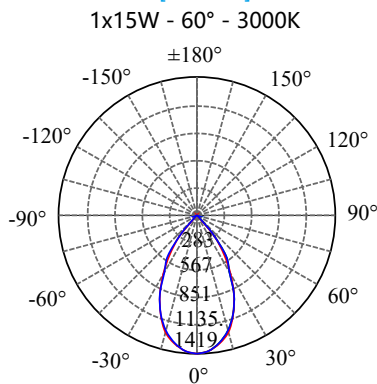

• **PERFORMANCE**

- 1x10W - 36V - 250mA - 1182lm
- 1x15W - 36V - 350mA - 1743lm
- 1x20W - 36V - 500mA - 2385lm