



- Aluminium housing with corrosion resistant powdercoat
- 8mm thick toughened FLUSH glass diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

• **CODE - IP65 COLOR**

UDRB08102 BLACK
UDRG08102 GREY
UDRW08102 WHITE

POWER: 2x5/8W

• **CODE - IP65 COLOR**

UDRB08152 BLACK
UDRG08152 GREY
UDRW08152 WHITE

POWER: 2x5/8W

• **CODE - IP65 COLOR**

UDRB08202 BLACK
UDRG08202 GREY
UDRW08202 WHITE

POWER: 2x5/8W

• **CODE - IP65 COLOR**

UDRB08101 BLACK
UDRG08101 GREY
UDRW08101 WHITE

POWER: 1x5/10W

• **CODE - IP65 COLOR**




UDRB08151 BLACK
UDRG08151 GREY
UDRW08151 WHITE

POWER: 1x5/10W

• **CODE - IP65 COLOR**


UDRB08201 BLACK
UDRG08201 GREY
UDRW08201 WHITE

POWER: 1x5/10W

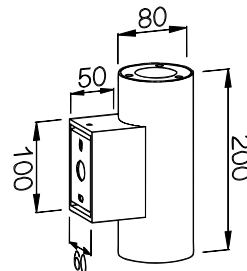


• **PHOTOMETRIC [Unit: cd]**

2x5W - 60° - 3000K

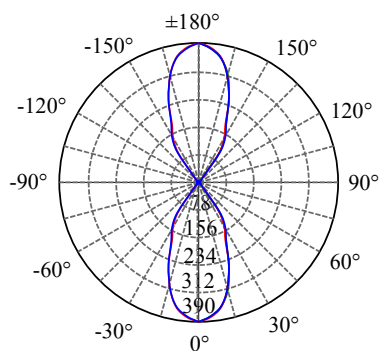

1x5W - 60° - 3000K

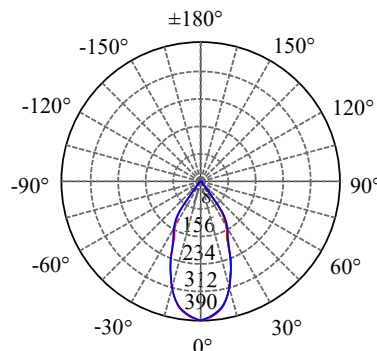

• **PERFORMANCE**

2x5W - 36V - 250mA - 886lm
2x8W - 36V - 350mA - 1367lm
1x5W - 36V - 150mA - 425lm
1x10W - 36V - 250mA - 882lm