

- Aluminium housing with corrosion resistant powdercoat
- 8mm thick toughened FLUSH glass diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

• **CODE - IP65 COLOR**

UDRB20202 BLACK  
UDRG20202 GREY  
UDRW20202 WHITE

POWER: 2x20/30/40/60W

• **CODE - IP65 COLOR**

UDRB20302 BLACK  
UDRG20302 GREY  
UDRW20302 WHITE

POWER: 2x20/30/40/60W

• **CODE - IP65 COLOR**

UDRB20402 BLACK  
UDRG20402 GREY  
UDRW20402 WHITE

POWER: 2x20/30/40/60W

• **CODE - IP65 COLOR**

UDRB20602 BLACK  
UDRG20602 GREY  
UDRW20602 WHITE

POWER: 2x20/30/40/60W

• **CODE - IP65 COLOR**

UDRB20201 BLACK  
UDRG20201 GREY  
UDRW20201 WHITE

POWER: 1x20/30/40/60W

• **CODE - IP65 COLOR**





UDRB20301 BLACK  
UDRG20301 GREY  
UDRW20301 WHITE

POWER: 1x20/30/40/60W




• **CODE - IP65 COLOR**

UDRB20401 BLACK  
UDRG20401 GREY  
UDRW20401 WHITE

POWER: 1x20/30/40/60W

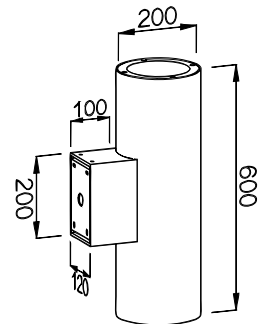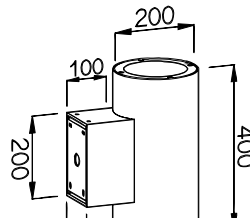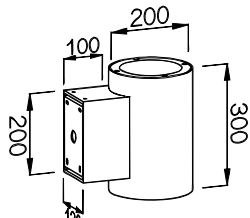

- **PHOTOMETRIC [Unit: cd]**

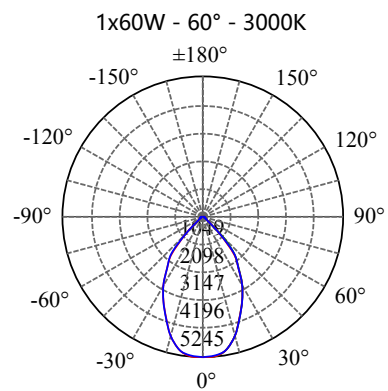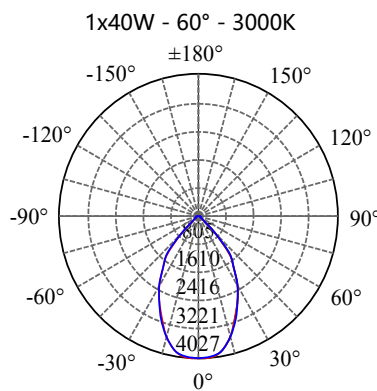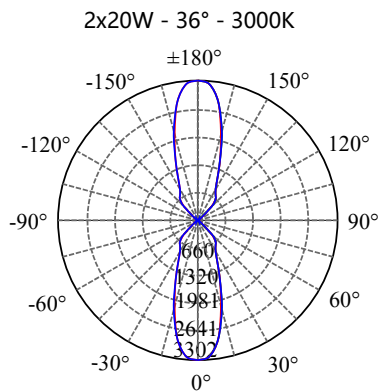

• **PERFORMANCE**

2x20W - 36V - 1050mA - 4247lm  
2x30W - 36V - 1500mA - 6260lm  
2x40W - 36V - 2100mA - 8385lm  
2x60W - 36V - 3300mA - 12326lm

1x20W - 36V - 500mA - 2127lm  
1x30W - 36V - 750mA - 3185lm  
1x40W - 36V - 1050mA - 4270lm  
1x60W - 36V - 1650mA - 6263lm