

- Aluminium housing with corrosion resistant powdercoat
- 3mm toughened glass diffuser
- CE/SAA/IP20/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20** **COLOR**
 UDRBB15202 BLACK
 UDRBW15202 WHITE

POWER: 2x15/20W

- **CODE - IP20** **COLOR**
 UDRBB15302 BLACK
 UDRBW15302 WHITE



POWER: 2x15/20/30W

- **CODE - IP20** **COLOR**
 UDRBB15201 BLACK
 UDRBW15201 WHITE




POWER: 1x15/20/30W

- **CODE - IP20** **COLOR**
 UDRBB15301 BLACK
 UDRBW15301 WHITE

POWER: 1x15/20/30W

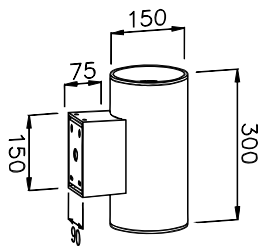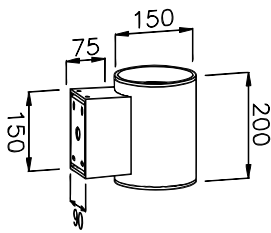

• **PHOTOMETRIC [Unit:: cd]**

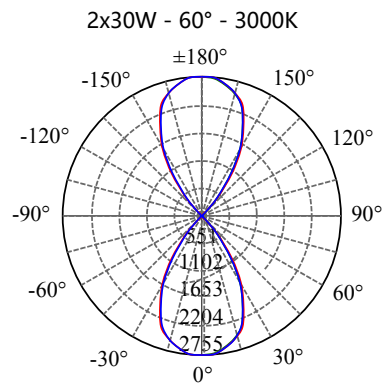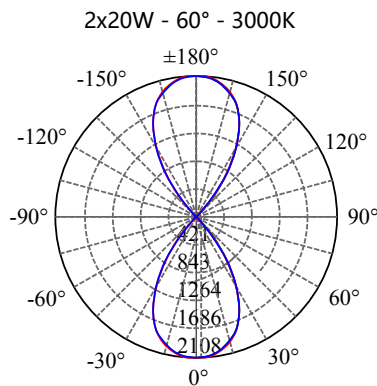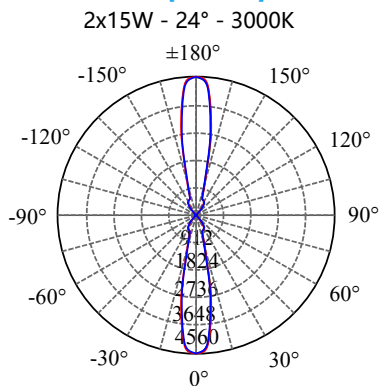

• **PERFORMANCE**

- 2x15W - 36V - 750mA - 3438lm
- 2x20W - 36V - 1050mA - 4668lm
- 2x30W - 36V - 1500mA - 7025lm

- 1x15W - 36V - 350mA - 1723lm
- 1x20W - 36V - 500mA - 2335lm
- 1x30W - 36V - 750mA - 3508lm