



- Aluminium housing with corrosion resistant powdercoat
- 8mm thick toughened FLUSH glass diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP65 COLOR**  
UDSB10102 BLACK  
UDSG10102 GREY  
UDSW10102 WHITE  
**POWER:** 2x5/8W




- **CODE - IP65 COLOR**  
UDSB10152 BLACK  
UDSG10152 GREY  
UDSW10152 WHITE  
**POWER:** 2x5/8W

- **CODE - IP65 COLOR**  
UDSB10202 BLACK  
UDSG10202 GREY  
UDSW10202 WHITE  
**POWER:** 2x5/8W



- **CODE - IP65 COLOR**  
UDSB10101 BLACK  
UDSG10101 GREY  
UDSW10101 WHITE  
**POWER:** 1x5/10/15W

- **CODE - IP65 COLOR**  
UDSB10151 BLACK  
UDSG10151 GREY  
UDSW10151 WHITE  
**POWER:** 1x5/10/15W

- **CODE - IP65 COLOR**  
UDSB10201 BLACK  
UDSG10201 GREY  
UDSW10201 WHITE  
**POWER:** 1x5/10/15W



• **PHOTOMETRIC [Unit: cd]**

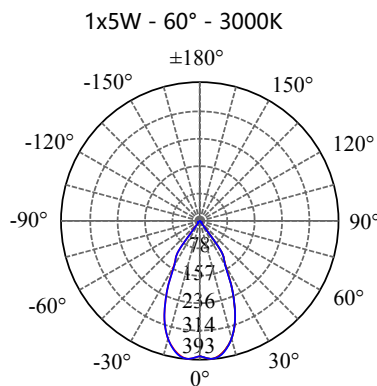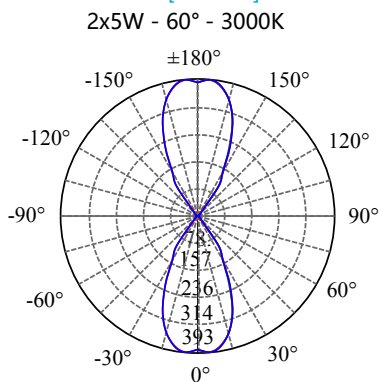

• **PERFORMANCE**

- 1x5W - 36V - 150mA - 448lm
- 1x10W - 36V - 250mA - 895lm
- 1x15W - 36V - 350mA - 1232lm

- 2x5W - 36V - 250mA - 897lm
- 2x8W - 36V - 350mA - 1384lm