



- Aluminium housing with corrosion resistant powdercoat
- 8mm thick toughened FLUSH glass diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/ 24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP65 COLOR**
- UDRB10102 BLACK
- UDRG10102 GREY
- UDRW10102 WHITE

POWER: 2x5/8W

- **CODE - IP65 COLOR**
- UDRB10152 BLACK
- UDRG10152 GREY
- UDRW10152 WHITE

POWER: 2x5/8W

- **CODE - IP65 COLOR**
- UDRB10202 BLACK
- UDRG10202 GREY
- UDRW10202 WHITE

POWER: 2x5/8W

- **CODE - IP65 COLOR**
- UDRB10101 BLACK
- UDRG10101 GREY
- UDRW10101 WHITE




POWER: 1x5/10/15W

- **CODE - IP65 COLOR**
- UDRB10151 BLACK
- UDRG10151 GREY
- UDRW10151 WHITE



POWER: 1x5/10/15W

- **CODE - IP65 COLOR**
- UDRB10201 BLACK
- UDRG10201 GREY
- UDRW10201 WHITE

POWER: 1x5/10/15W

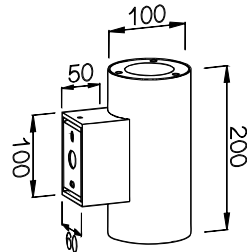

• **PHOTOMETRIC [Unit: cd]**

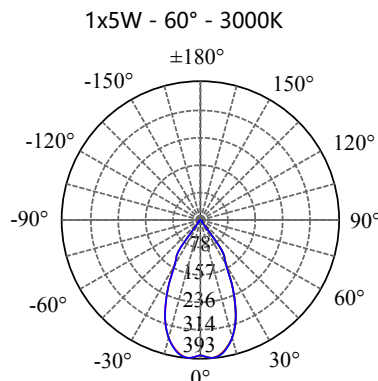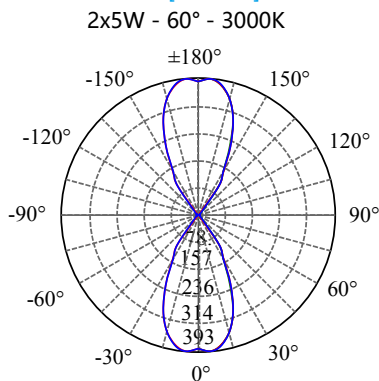

• **PERFORMANCE**

1x5W - 36V - 150mA - 448lm  
 1x10W - 36V - 250mA - 895lm  
 1x15W - 36V - 350mA - 1232lm

2x5W - 36V - 250mA - 897lm  
 2x8W - 36V - 350mA - 1384lm