




- Aluminium housing with corrosion resistant powdercoat
- 3mm toughened glass diffuser
- CE/SAA/IP20/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

• CODE - IP20	COLOR
UDRAB08152	BLACK
UDRABW08152	BLACK+WHITE
UDRABG08152	BLACK+GOLD
UDRAW08152	WHITE
UDRAWB08152	WHITE+BLACK
UDRAWG08152	WHITE+GOLD

POWER: 2x5/8W

• CODE - IP20	COLOR
UDRAB08151	BLACK
UDRABW08151	BLACK+WHITE
UDRABG08151	BLACK+GOLD
UDRAW08151	WHITE
UDRAWB08151	WHITE+BLACK
UDRAWG08151	WHITE+GOLD

POWER: 1x5/10W

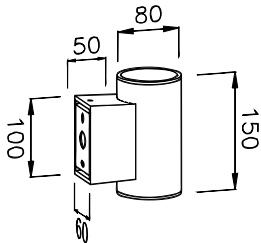


• CODE - IP20	COLOR
UDRAB08202	BLACK
UDRABW08202	BLACK+WHITE
UDRABG08202	BLACK+GOLD
UDRAW08202	WHITE
UDRAWB08202	WHITE+BLACK
UDRAWG08202	WHITE+GOLD

POWER: 2x5/8W


• CODE - IP20	COLOR
UDRAB08201	BLACK
UDRABW08201	BLACK+WHITE
UDRABG08201	BLACK+GOLD
UDRAW08201	WHITE
UDRAWB08201	WHITE+BLACK
UDRAWG08201	WHITE+GOLD

POWER: 1x5/10W

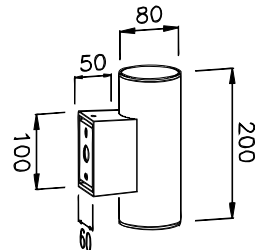


• PHOTOMETRIC [Unit: cd]

2x5W - 60° - 3000K

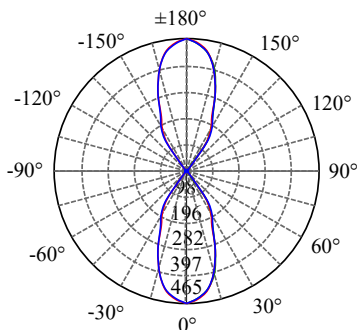

1x5W - 60° - 3000K

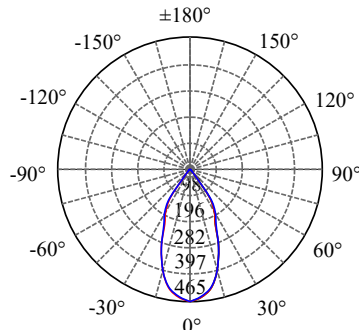

• PERFORMANCE

2x5W - 36V - 250mA - 1145lm
2x8W - 36V - 350mA - 1711lm

1x5W - 36V - 150mA - 554lm
1x10W - 36V - 250mA - 1112lm