




- Aluminium housing with corrosion resistant powdercoat
- 3mm toughened glass diffuser
- CE/SAA/IP20/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

• CODE - IP20	COLOR
UDRAB10152	BLACK
UDRABW10152	BLACK+WHITE
UDRABG10152	BLACK+GOLD
UDRAW10152	WHITE
UDRAWB10152	WHITE+BLACK
UDRAWG10152	WHITE+GOLD

POWER: 2x5/8W

• CODE - IP20	COLOR
UDRAB10151	BLACK
UDRABW10151	BLACK+WHITE
UDRABG10151	BLACK+GOLD
UDRAW10151	WHITE
UDRAWB10151	WHITE+BLACK
UDRAWG10151	WHITE+GOLD

POWER: 1x5/10/15W

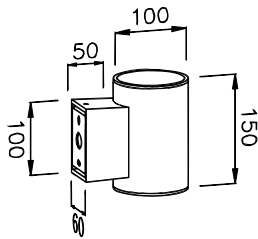


• CODE - IP20	COLOR
UDRAB10202	BLACK
UDRABW10202	BLACK+WHITE
UDRABG10202	BLACK+GOLD
UDRAW10202	WHITE
UDRAWB10202	WHITE+BLACK
UDRAWG10202	WHITE+GOLD

POWER: 2x5/8W


• CODE - IP20	COLOR
UDRAB10201	BLACK
UDRABW10201	BLACK+WHITE
UDRABG10201	BLACK+GOLD
UDRAW10201	WHITE
UDRAWB10201	WHITE+BLACK
UDRAWG10201	WHITE+GOLD

POWER: 1x5/10/15W




• PHOTOMETRIC [Unit: cd]

2x5W - 60° - 3000K

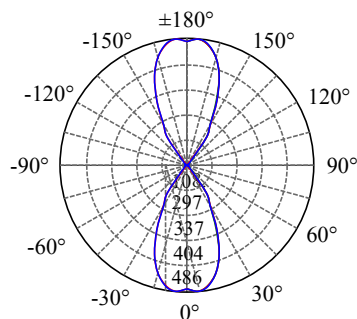

1x5W - 60° - 3000K

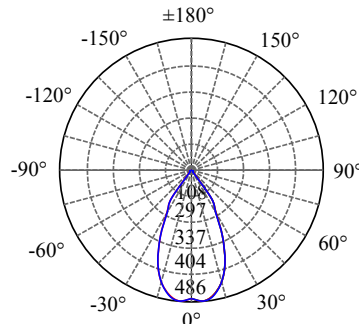

• PERFORMANCE

1x5W - 36V - 150mA - 577lm
 1x10W - 36V - 250mA - 1152lm
 1x15W - 36V - 350mA - 1725lm

2x5W - 36V - 250mA - 1175lm
 2x8W - 36V - 350mA - 1757lm