



- Aluminium housing corrosion resistant powdercoat
- 8mm thick toughened FLUSH glass diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP65** **COLOR**
- UDSB08102 BLACK
- UDSG08102 GREY
- UDSW08102 WHITE

POWER: 2x5/8W

- **CODE - IP65** **COLOR**
- UDSB08152 BLACK
- UDSG08152 GREY
- UDSW08152 WHITE

POWER: 2x5/8W

- **CODE - IP65** **COLOR**
- UDSB08202 BLACK
- UDSG08202 GREY
- UDSW08202 WHITE

POWER: 2x5/8W

- **CODE - IP65** **COLOR**
- UDSB08101 BLACK
- UDSG08101 GREY
- UDSW08101 WHITE




POWER: 1x5/10W

- **CODE - IP65** **COLOR**
- UDSB08151 BLACK
- UDSG08151 GREY
- UDSW08151 WHITE



POWER: 1x5/10W

- **CODE - IP65** **COLOR**
- UDSB08201 BLACK
- UDSG08201 GREY
- UDSW08201 WHITE

POWER: 1x5/10W

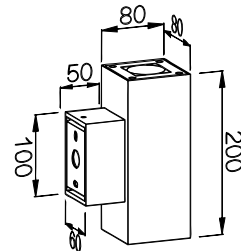

• **PHOTOMETRIC [Unit: cd]**

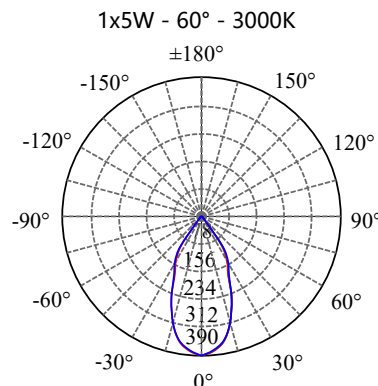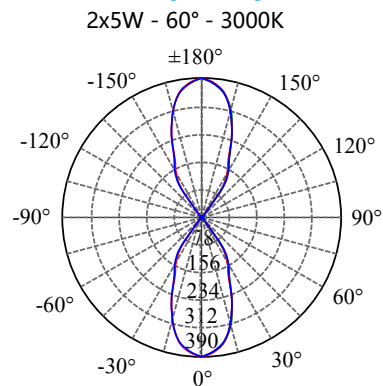

• **PERFORMANCE**

- 2x5W - 36V - 250mA - 886lm
- 2x8W - 36V - 350mA - 1367lm
- 1x5W - 36V - 150mA - 425lm
- 1x10W - 36V - 250mA - 882lm