

- Aluminium housing with corrosion resistant powdercoat
- 3mm toughened glass diffuser
- CE/SAA/IP20/IP65/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20** **COLOR**
SDRAB202020 BLACK
SDRAW202020 WHITE

POWER: 1x20/30/40/60W

- **CODE - IP20** **COLOR**
SDRAB203020 BLACK
SDRAW203020 WHITE

POWER: 1x20/30/40/60W

- **CODE - IP20** **COLOR**
SDRAB204020 BLACK
SDRAW204020 WHITE

POWER: 1x20/30/40/60W

- **CODE - IP65** **COLOR**
SDRAB202065 BLACK
SDRAW202065 WHITE




POWER: 1x20/30/40/60W

- **CODE - IP65** **COLOR**
SDRAB203065 BLACK
SDRAW203065 WHITE




POWER: 1x20/30/40/60W

- **CODE - IP65** **COLOR**
SDRAB204065 BLACK
SDRAW204065 WHITE

POWER: 1x20/30/40/60W

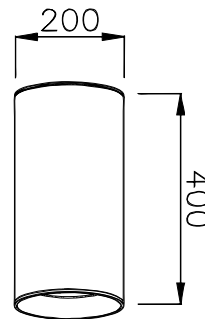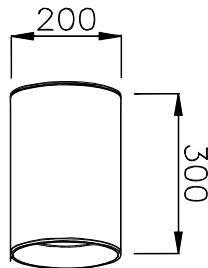

• **PHOTOMETRIC [Unit: cd]**

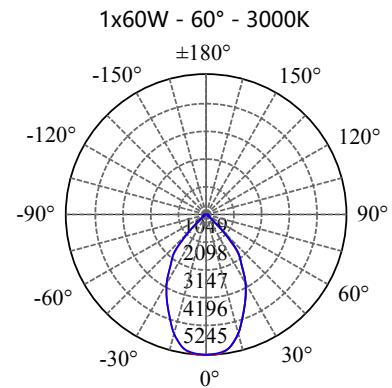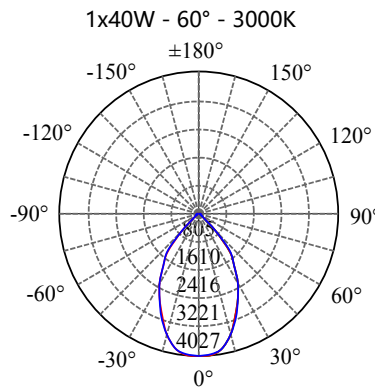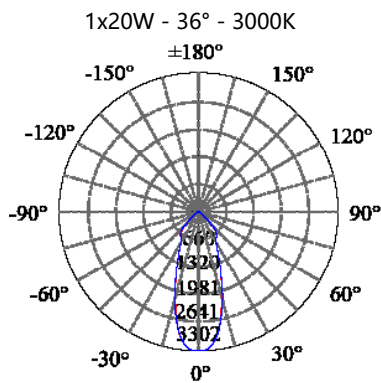

• **PERFORMANCE**

- 1x20W - 36V - 500mA - 2127lm
- 1x30W - 36V - 750mA - 3185lm
- 1x40W - 36V - 1050mA - 4270lm
- 1x60W - 36V - 1650mA - 6263lm