



- Aluminium housing with corrosion resistant powdercoat
- 8mm thick toughened glass diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years


- **CODE - IP65**    **COLOR**  
 UDRADJB1535    BLACK  
 UDRADJG1535    GREY  
 UDRADJW1535    WHITE  
**POWER:** 1x15/20/30W






- **CODE - IP65**    **COLOR**  
 UDRADJB1565    BLACK  
 UDRADJG1565    GREY  
 UDRADJW1565    WHITE  
**POWER:** 1x15/20/30W

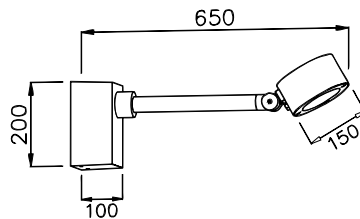

- **CODE - IP65**    **COLOR**  
 UDRADJB1595    BLACK  
 UDRADJG1595    GREY  
 UDRADJW1595    WHITE  
**POWER:** 1x15/20/30W

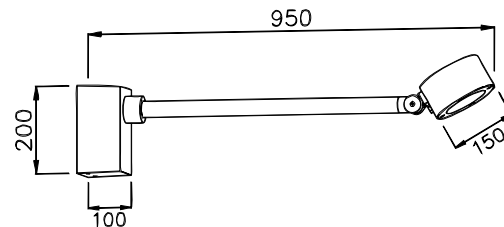

• **PHOTOMETRIC [Unit: cd]**

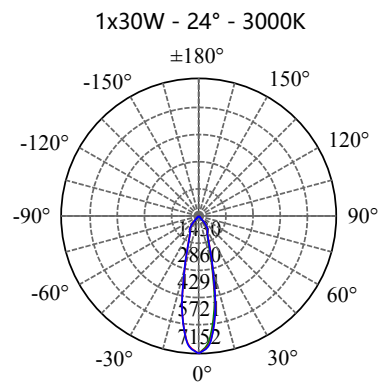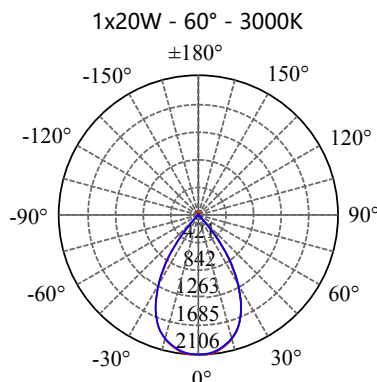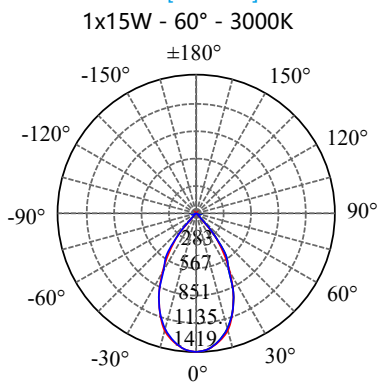

• **PERFORMANCE**

- 1x15W - 36V - 350mA - 1556lm
- 1x20W - 36V - 500mA - 2039lm
- 1x30W - 36V - 750mA - 3058lm