

- Aluminium housing with corrosion resistant powdercoat
- 8mm thick toughened FLUSH glass diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP65** **COLOR**
- UDSNB15202 BLACK
- UDSNG15202 GREY
- UDSNW15202 WHITE

POWER: 2x15/20/30W

- **CODE - IP65** **COLOR**
- UDSNB15302 BLACK
- UDSNG15302 GREY
- UDSNW15302 WHITE



POWER: 2x15/20/30/40W

- **CODE - IP65** **COLOR**
- UDSNB15201 BLACK
- UDSNG15201 GREY
- UDSNW15201 WHITE




POWER: 1x15/20/30/40W

- **CODE - IP65** **COLOR**
- UDSNB15301 BLACK
- UDSNG15301 GREY
- UDSNW15301 WHITE

POWER: 1x15/20/30/40W



• **PHOTOMETRIC [Unit:: cd]**

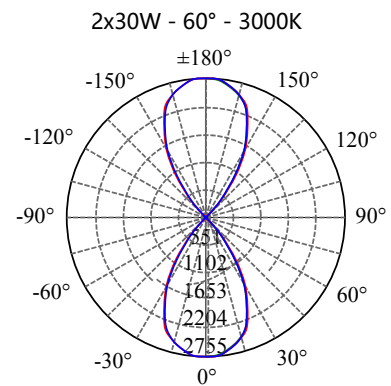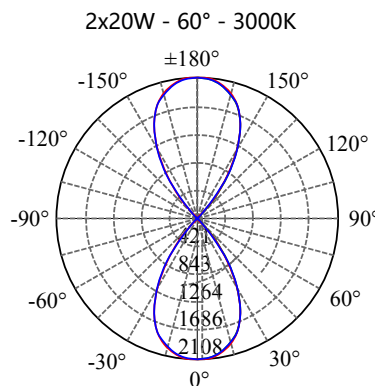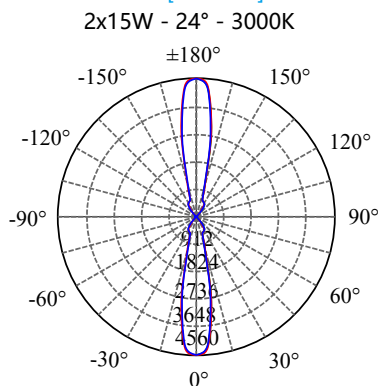

• **PERFORMANCE**

- 2x15W - 36V - 750mA - 3053lm
- 2x20W - 36V - 1050mA - 4075lm
- 2x30W - 36V - 1500mA - 6163lm
- 2x40W - 36V - 2100mA - 7988lm

- 1x15W - 36V - 350mA - 1556lm
- 1x20W - 36V - 500mA - 2039lm
- 1x30W - 36V - 750mA - 3058lm
- 1x40W - 36V - 1050mA - 3977lm