

- Aluminium housing with corrosion resistant powdercoat
- 3mm toughened glass diffuser
- CE/SAA/IP20/IP65/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20** **COLOR**
SDRBB101220 BLACK
SDRBW101220 WHITE
POWER: 1x5/10W




- **CODE - IP20** **COLOR**
SDRBB101520 BLACK
SDRBW101520 WHITE
POWER: 1x5/10/15W

- **CODE - IP20** **COLOR**
SDRBB102020 BLACK
SDRBW102020 WHITE
POWER: 1x5/10/15W




- **CODE - IP65** **COLOR**
SDRBB101265 BLACK
SDRBW101265 WHITE
POWER: 1x5/10W

- **CODE - IP65** **COLOR**
SDRBB101565 BLACK
SDRBW101565 WHITE
POWER: 1x5/10/15W

- **CODE - IP65** **COLOR**
SDRBB102065 BLACK
SDRBW102065 WHITE
POWER: 1x5/10/15W

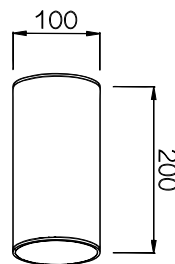

• **PHOTOMETRIC [Unit: cd]**

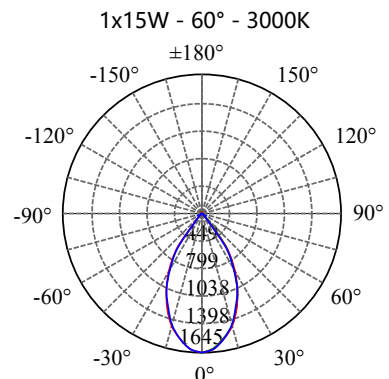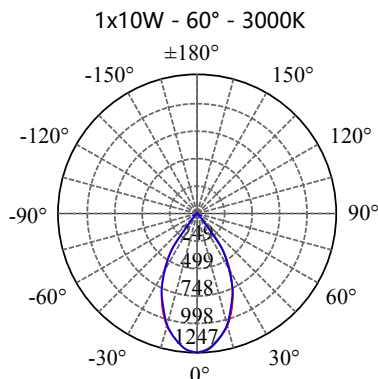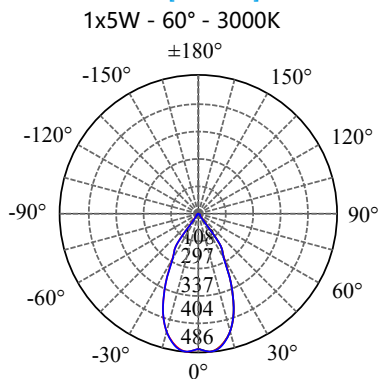

• **PERFORMANCE**

- 1x5W - 36V - 150mA - 577lm
- 1x10W - 36V - 250mA - 1152lm
- 1x15W - 36V - 350mA - 1725lm