

- Aluminium housing with corrosion resistant powdercoat
- 8mm thick toughened FLUSH glass diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

• **CODE-IP65 COLOR**

- SDRB1515 BLACK
- SDRG1515 GREY
- SDRW1515 WHITE

• **CODE-IP65 COLOR**

- SDRB1520 BLACK
- SDRG1520 GREY
- SDRW1520 WHITE




• **COD-IP65 COLOR**

- SDRB1530 BLACK
- SDRG1530 GREY
- SDRW1530 WHITE




POWER: 1x15/20/30/40W

POWER: 1x15/20/30/40W

POWER: 1x15/20/30/40W

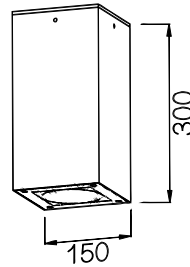

• **PHOTOMETRIC [Unit: cd]**

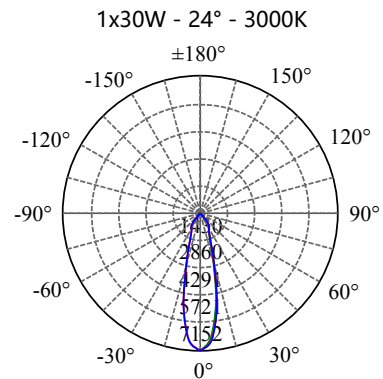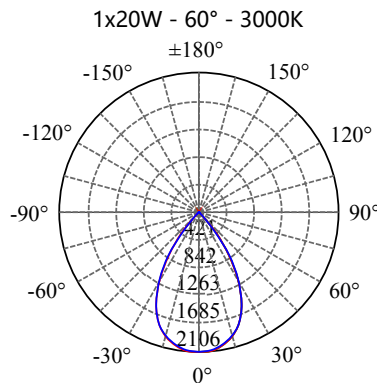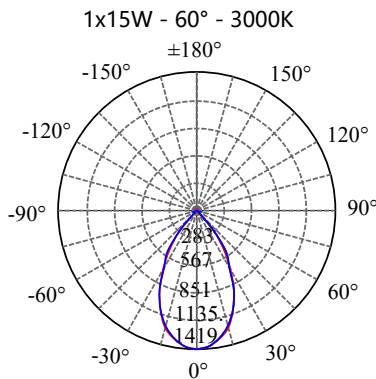

• **PERFORMANCE**

- 1x15W - 36V - 350mA - 1556lm
- 1x20W - 36V - 500mA - 2039m
- 1x30W - 36V - 750mA - 3058lm
- 1x40W - 36V - 1050mA - 3977lm