




- Aluminium housing with corrosion resistant powdercoat
- 3mm toughened glass diffuser
- Cut out :  $\Phi 110-115\text{mm}$
- CE/SAA/IP20/IP65
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI $\geq 80/90$
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20**      **COLOR**  
DLRBB12153020    BLACK  
DLRBW12153020    WHITE



POWER: 1x10/15/18W

- **CODE - IP65**      **COLOR**  
DLRBB12153065    BLACK  
DLRBW12153065    WHITE

POWER: 1x10/15/18W

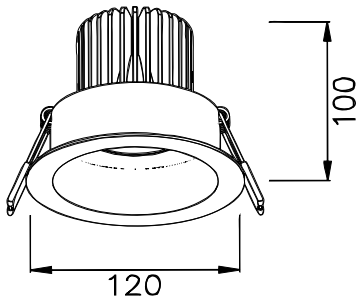

• **PHOTOMETRIC [Unit:: cd]**

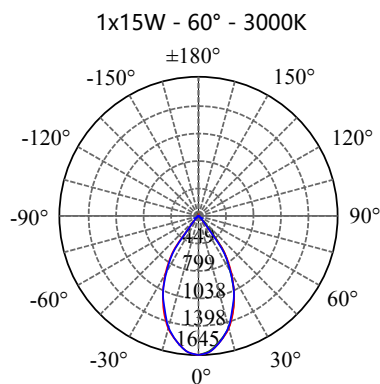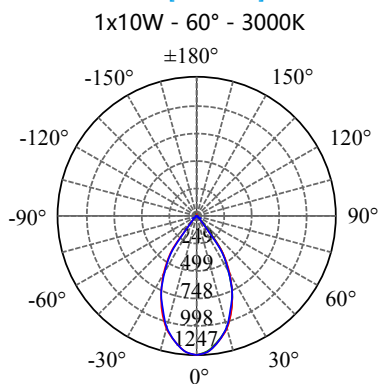

• **PERFORMANCE**

- 1x10W - 36V - 250mA - 1152lm
- 1x15W - 36V - 350mA - 1725lm
- 1x18W - 36V - 450mA - 2067lm