
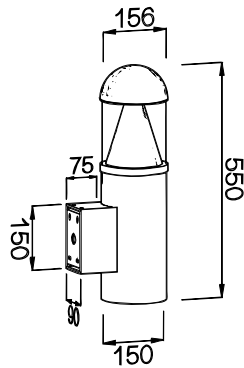



- Aluminium housing with corrosion resistant powdercoat
- 4mm thick PMMA diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP65**    **COLOR**  
 WLRDFB1545    BLACK  
 WLRDFG1545    GREY  
 WLRDFW1545    WHITE  
  
**POWER:** 1x15/20/30W

- **CODE - IP65**    **COLOR**  
 WLRDFB1555    BLACK  
 WLRDFG1555    GREY  
 WLRDFW1555    WHITE  
  
**POWER:** 1x15/20/30W

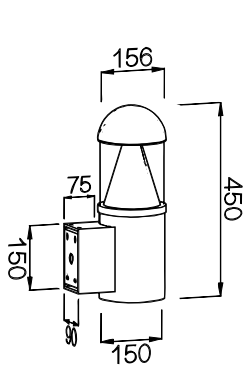

- **PHOTOMETRIC [Unit: cd]**  
 1x15W - 3000K

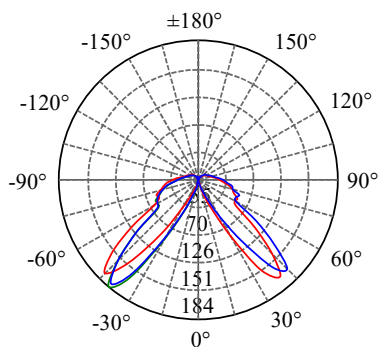

- **PERFORMANCE**  
 1x15W - 36V - 350mA - 945lm  
 1x20W - 36V - 500mA - 1268lm  
 1x30W - 36V - 750mA - 1905lm