


- Aluminium housing with corrosion resistant powdercoat
- 8mm thick toughened glass diffuser
- CE/SAA/IP20/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI $\geq$ 80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

• **CODE - IP65** **COLOR**

UDRADJB2040 BLACK
UDRADJG2040 GREY
UDRADJW2040 WHITE


POWER: 1x20/30/40/60W



• **CODE - IP65** **COLOR**

UDRADJB2070 BLACK
UDRADJG2070 GREY
UDRADJW2070 WHITE


POWER: 1x20/30/40/60W

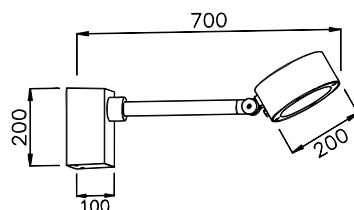



• **CODE - IP65** **COLOR**

UDRADJB20100 BLACK
UDRADJG20100 GREY
UDRADJW20100 WHITE

POWER: 1x20/30/40/60W

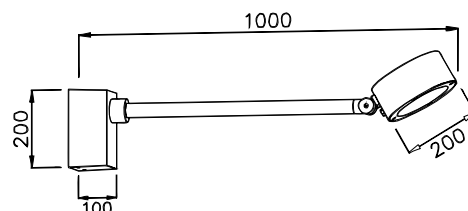

• **PHOTOMETRIC [Unit: cd]**

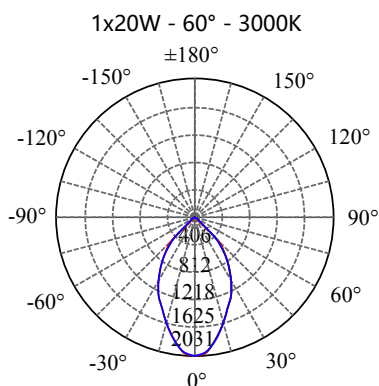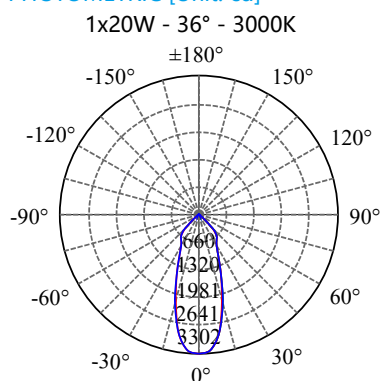

• **PERFORMANCE**

1x20W - 36V - 500mA - 2127lm
1x30W - 36V - 750mA - 3185lm
1x40W - 36V - 1050mA - 4270lm
1x60W - 36V - 1650mA - 6263lm