

- Aluminium housing with corrosion resistant powdercoat
- 3mm toughened glass diffuser
- CE/SAA/IP20/IP65/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20**    **COLOR**  
SDRBB121520    BLACK  
SDRBW121520    WHITE

**POWER:** 1x10/15/20W

- **CODE - IP20**    **COLOR**  
SDRBB122020    BLACK  
SDRBW122020    WHITE



**POWER:** 1x10/15/20W

- **CODE - IP65**    **COLOR**  
SDRBB121565    BLACK  
SDRBW121565    WHITE



**POWER:** 1x10/15/20W

- **CODE - IP65**    **COLOR**  
SDRBB122065    BLACK  
SDRBW122065    WHITE

**POWER:** 1x10/15/20W

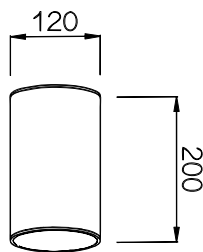

• **PHOTOMETRIC [Unit: cd]**

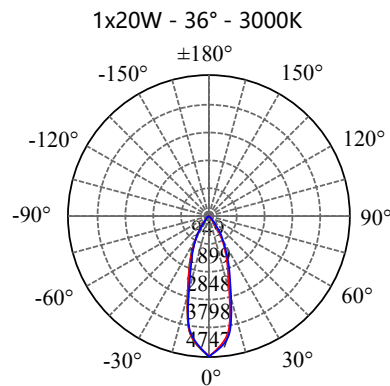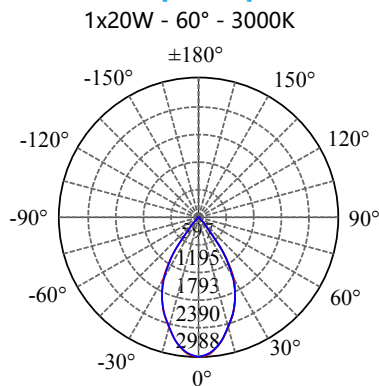

• **PERFORMANCE**

- 1x10W - 36V - 250mA - 1182lm
- 1x15W - 36V - 350mA - 1743lm
- 1x20W - 36V - 500mA - 2385lm