

- Aluminium housing with corrosion resistant powdercoat
- 4mm thick PMMA diffuser
- CE/SAA/IP65/Class 1
- SAMSUNG SMD: 3000K/4000K/6000K/CRI≥80/90
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

• **CODE - IP65**    **COLOR**



- WLRFFB2060    BLACK
- WLRFFG2060    GREY
- WLRFFW2060    WHITE

**POWER:** 1x20/30/40/60W

• **CODE - IP65**    **COLOR**


- WLRFFB2070    BLACK
- WLRFFG2070    GREY
- WLRFFW2070    WHITE

**POWER:** 1x20/30/40/60W

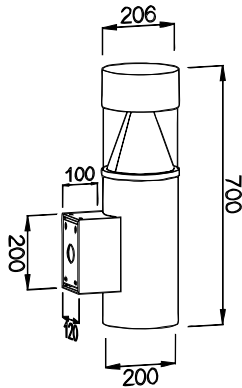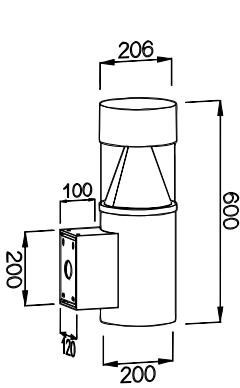

• **PHOTOMETRIC [Unit: cd]**

1x20W - 3000K

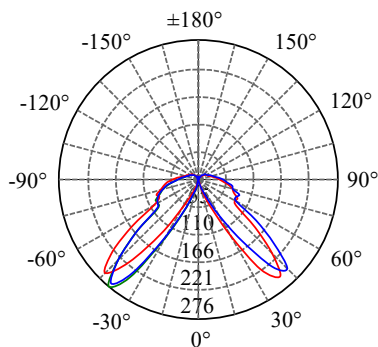

• **PERFORMANCE**

- 1x20W - 36V - 500mA - 1392lm
- 1x30W - 36V - 750mA - 2073m
- 1x40W - 36V - 1050mA - 2786lm
- 1x60W - 36V - 1650mA - 4175lm