

- Aluminium housing with corrosion resistant powdercoat
- 4mm thick PMMA diffuser
- CE/SAA/IP65/Class 1
- SAMSUNG SMD: 3000K/4000K/6000K/CRI $\geq$ 80/90
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

• **CODE (IP65) COLOR**



WLRDFB2060 BLACK
WLRDFG2060 GREY
WLRDFW2060 WHITE

POWER: 1x20/30/40/60W


• **CODE (IP65) COLOR**

WLRDFB2070 BLACK
WLRDFG2070 GREY
WLRDFW2070 WHITE

POWER: 1x20/30/40/60W

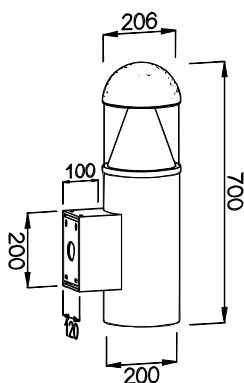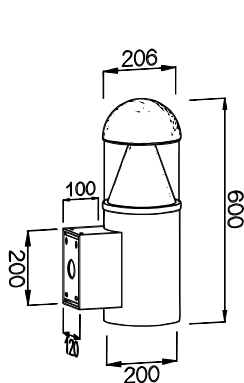

• **PHOTOMETRIC [Unit: cd]**

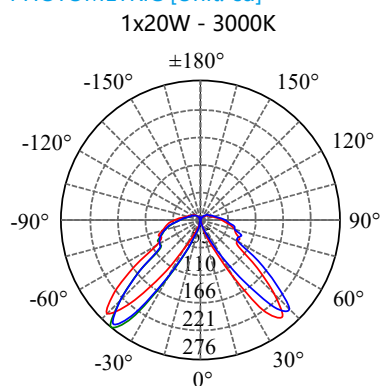

• **PERFORMANCE**

1x20W - 36V - 500mA - 1392lm
1x30W - 36V - 750mA - 2073m
1x40W - 36V - 1050mA - 2786lm
1x60W - 36V - 1650mA - 4175lm