

- Aluminium housing with corrosion resistant powdercoat
- 4mm thick PMMA diffuser
- CE/SAA/IP65/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

• **CODE - IP65** **COLOR**



- WLRFLB2060 BLACK
- WLRFLG2060 GREY
- WLRFLW2060 WHITE

POWER: 1x20/30/40/60W

• **CODE - IP65** **COLOR**


- WLRFLB2070 BLACK
- WLRFLG2070 GREY
- WLRFLW2070 WHITE

POWER: 1x20/30/40/60W

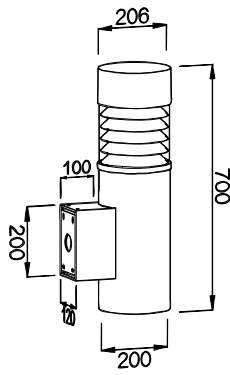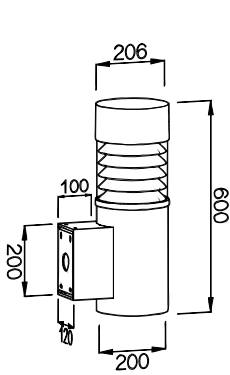

• **PHOTOMETRIC [Unit: cd]**

1x20W - 3000K

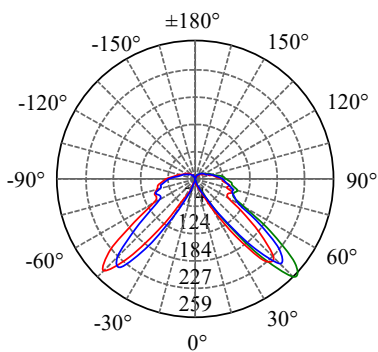

• **PERFORMANCE**

- 1x20W - 36V - 500mA - 1185lm
- 1x30W - 36V - 750mA - 1783lm
- 1x40W - 36V - 1050mA - 2376lm
- 1x60W - 36V - 1650mA - 3575lm