

- Aluminium housing with corrosion resistant powdercoat
- 3mm toughened glass diffuser
- CE/SAA/IP20/IP65/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

• **CODE - IP20**    **COLOR**  
 SDRBB202020    BLACK  
 SDRBW202020    WHITE

**POWER:** 1x20/30/40/60W

• **CODE - IP20**    **COLOR**  
 SDRBB203020    BLACK  
 SDRBW203020    WHITE

**POWER:** 1x20/30/40/60W

• **CODE - IP20**    **COLOR**  
 SDRBB204020    BLACK  
 SDRBW204020    WHITE

**POWER:** 1x20/30/40/60W

• **CODE - IP65**    **COLOR**  
 SDRBB202065    BLACK  
 SDRBW202065    WHITE




**POWER:** 1x20/30/40/60W

• **CODE - IP65**    **COLOR**  
 SDRBB203065    BLACK  
 SDRBW203065    WHITE




**POWER:** 1x20/30/40/60W

• **CODE - IP65**    **COLOR**  
 SDRBB204065    BLACK  
 SDRBW204065    WHITE

**POWER:** 1x20/30/40/60W

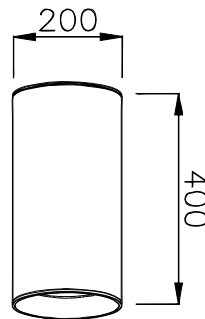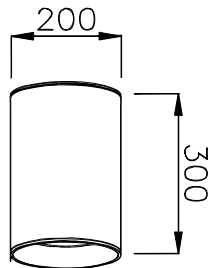

• **PHOTOMETRIC [Unit: cd]**

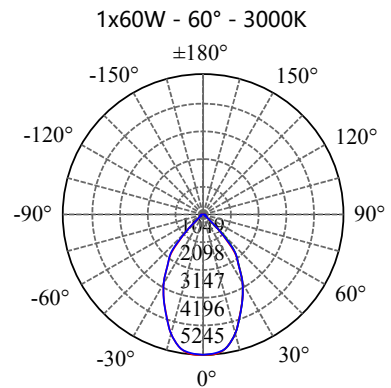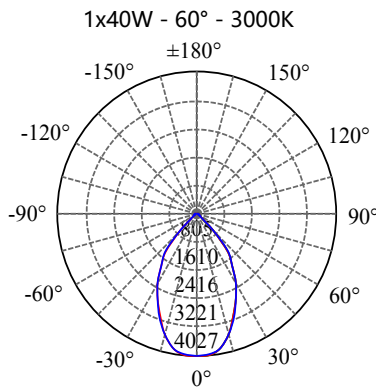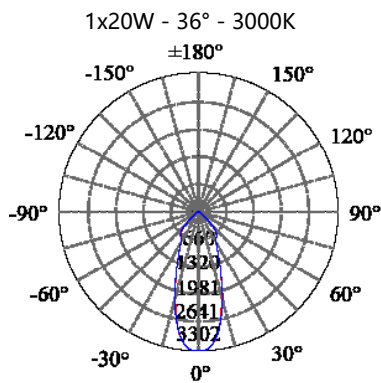

• **PERFORMANCE**

- 1x20W - 36V - 500mA - 2127lm
- 1x30W - 36V - 750mA - 3185lm
- 1x40W - 36V - 1050mA - 4270lm
- 1x60W - 36V - 1650mA - 6263lm