



- Aluminium housing with corrosion resistant powdercoat
- 8mm thick toughened glass diffuser
- CE/SAA/IP20/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years


- **CODE - IP65** **COLOR**
 UDSADJB1535 BLACK
 UDSADJG1535 GREY
 UDSADJW1535 WHITE
POWER: 1x15/20/30W






- **CODE - IP65** **COLOR**
 UDSADJB1565 BLACK
 UDSADJG1565 GREY
 UDSADJW1565 WHITE
POWER: 1x15/20/30W

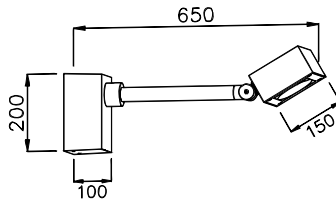

- **CODE - IP65** **COLOR**
 UDSADJB1595 BLACK
 UDSADJG1595 GREY
 UDSADJW1595 WHITE
POWER: 1x15/20/30W

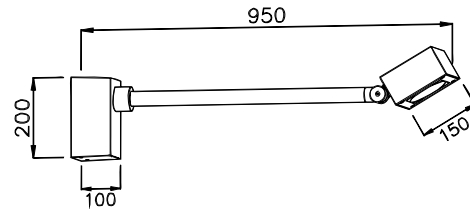

• **PHOTOMETRIC [Unit: cd]**

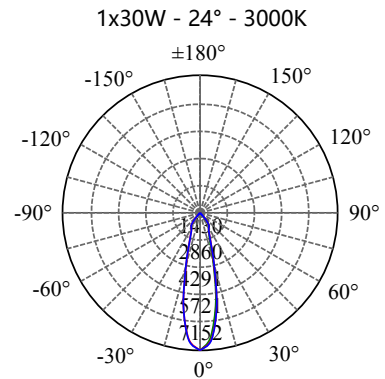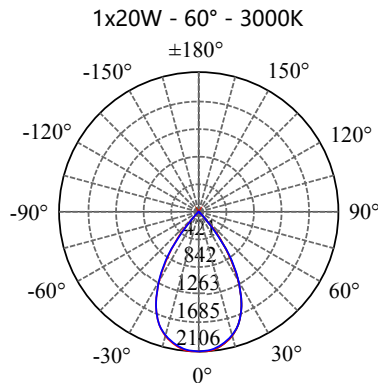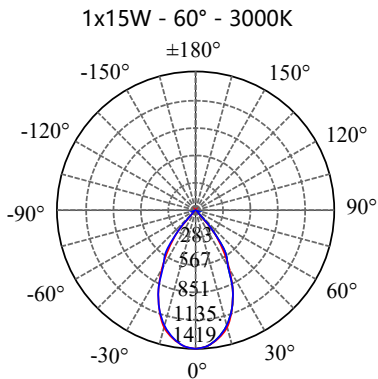

• **PERFORMANCE**

- 1x15W - 36V - 350mA - 1556lm
- 1x20W - 36V - 500mA - 2039m
- 1x30W - 36V - 750mA - 3058lm