


- Aluminium housing with corrosion resistant powdercoat
- 3mm toughened glass diffuser
- Cut out : $\Phi 215-225\text{mm}$
- CE/SAA/IP20/IP65
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI $\geq 80/90$
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20** **COLOR**
DLRAB23234020 BLACK
DLRAW23234020 WHITE



POWER: 1x20/30/40/60W

- **CODE - IP65** **COLOR**
DLRAB23234065 BLACK
DLRAW23234065 WHITE

POWER: 1x20/30/40/60W

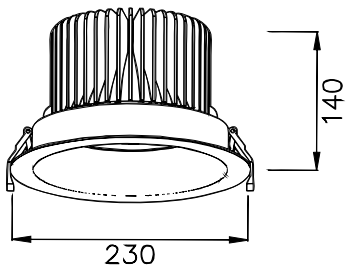

• **PHOTOMETRIC [Unit: cd]**

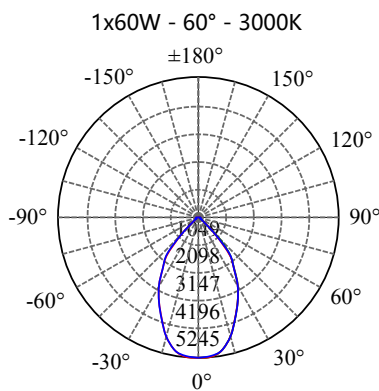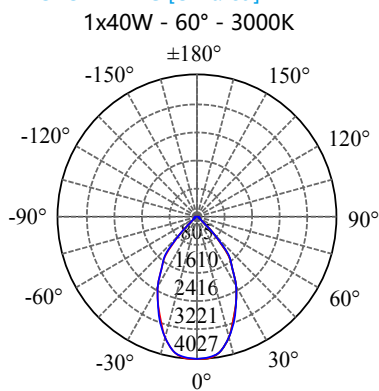

• **PERFORMANCE**

- 1x20W - 36V - 500mA - 2262lm
- 1x30W - 36V - 750mA - 3351lm
- 1x40W - 36V - 1050mA - 4535lm
- 1x60W - 36V - 1650mA - 6855lm