

- Aluminium housing with corrosion resistant powdercoat
- 3mm toughened glass diffuser
- Cut out : $\Phi 190-195\text{mm}$
- CE/SAA/IP20/IP65
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI $\geq 80/90$
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

• **CODE - IP20** **COLOR**


DLRB20202020 BLACK
DLRW20202020 WHITE

POWER: 1x20/30/40/60W



• **CODE - IP65** **COLOR**

DLRB20202065 BLACK
DLRW20202065 WHITE

POWER: 1x20/30/40/60W

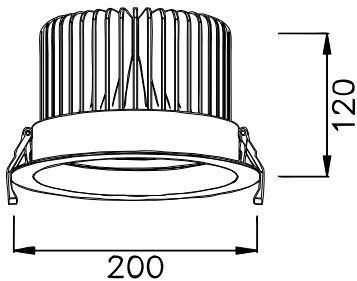

• **PHOTOMETRIC [Unit:: cd]**

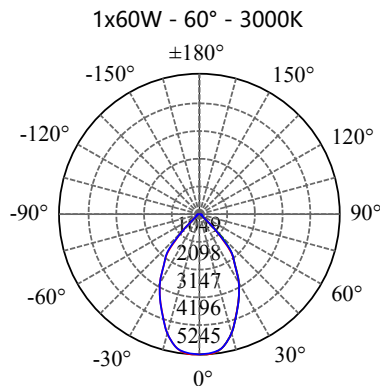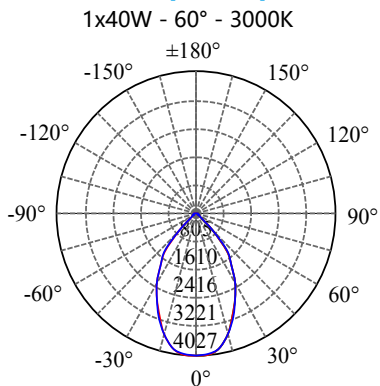

• **PERFORMANCE**

1x20W - 36V - 500mA - 2272lm
1x30W - 36V - 750mA - 3358lm
1x40W - 36V - 1050mA - 4545lm
1x60W - 36V - 1650mA - 6855lm