

- Aluminium housing with corrosion resistant powdercoat
- 3mm toughened glass diffuser
- Cut out : $\Phi 110-115\text{mm}$
- CE/SAA/IP20/IP65
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI $\geq 80/90$
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

• **CODE - IP20** **COLOR**


DLRB12044020 BLACK
DLRW12044020 WHITE

POWER: 1x10/15/20/25W




• **CODE - IP65** **COLOR**

DLRB12044065 BLACK
DLRW12044065 WHITE

POWER: 1x10/15/20/25W

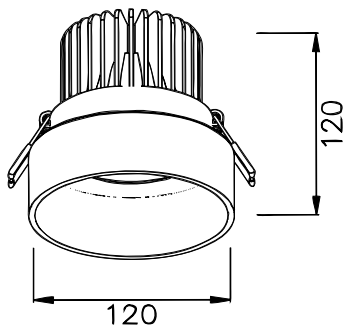

• **PHOTOMETRIC [Unit:: cd]**

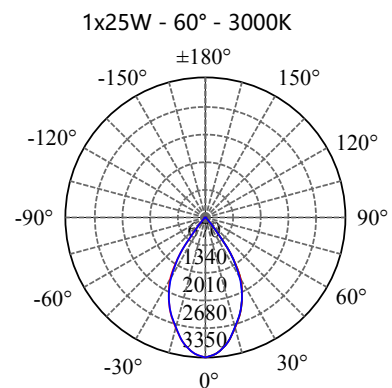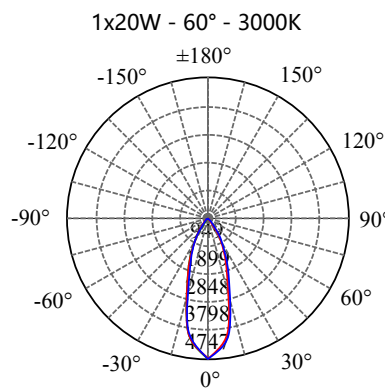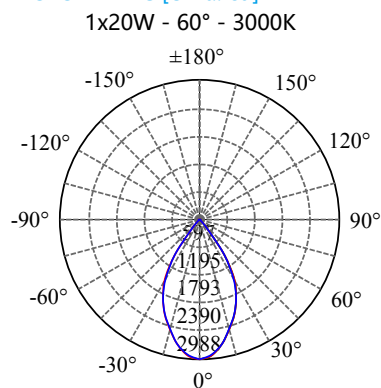

• **PERFORMANCE**

1x10W - 36V - 250mA - 1182lm
1x15W - 36V - 350mA - 1743lm
1x20W - 36V - 500mA - 2385lm
1x25W - 36V - 650mA - 2756lm