






- 316L# SS housing
- 10mm thick toughen FLUSH glass diffuser
- PC pre-buried bucket
- CE/SAA/IP66/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3 years

- **CODE - IP66 COLOR**
IGRSSB1512 BRUSHED
- POWER:** 1x5/10W

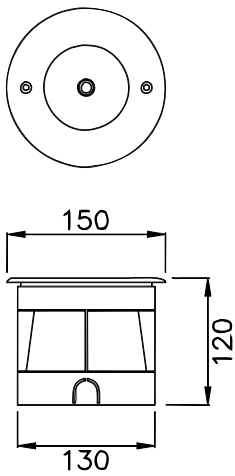

- **PHOTOMETRIC [Unit: cd]**

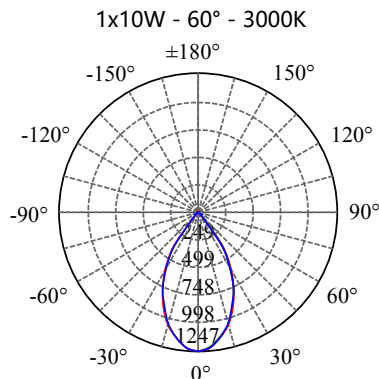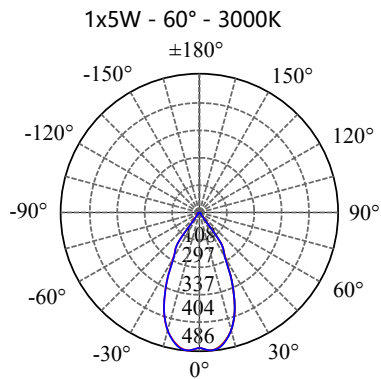

- **PERFORMANCE**

- 1x5W - 36V - 150mA - 498lm
- 1x10W - 36V - 250mA - 922lm