



- Aluminium housing with corrosion resistant powdercoat
- 3mm toughened glass diffuser
- CE/SAA/IP20/IP65/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20** **COLOR**
- PDRBB081520 BLACK
- PDRBW081520 WHITE
- POWER: 1x5/10W**




- **CODE - IP20** **COLOR**
- PDRBB082020 BLACK
- PDRBW082020 WHITE
- POWER: 1x5/10W**

- **CODE - IP20** **COLOR**
- PDRBB083020 BLACK
- PDRBW083020 WHITE
- POWER: 1x5/10W**



- **CODE - IP65** **COLOR**
- PDRBB081565 BLACK
- PDRBW081565 WHITE
- POWER: 1x5/10W**

- **CODE - IP65** **COLOR**
- PDRBB082065 BLACK
- PDRBW082065 WHITE
- POWER: 1x5/10W**

- **CODE - IP65** **COLOR**
- PDRBB083065 BLACK
- PDRBW083065 WHITE
- POWER: 1x5/10W**

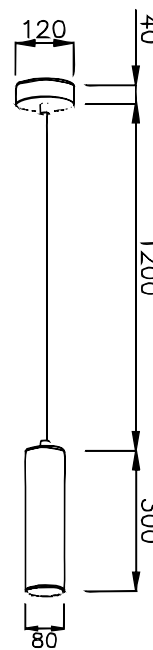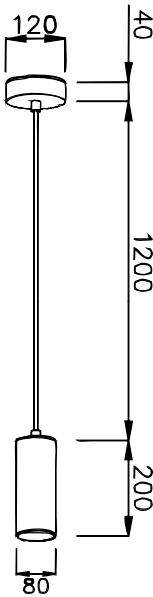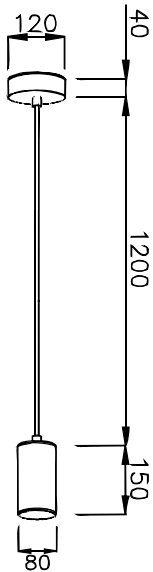

• **PHOTOMETRIC [Unit: cd]**

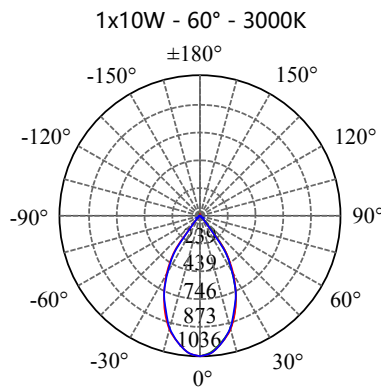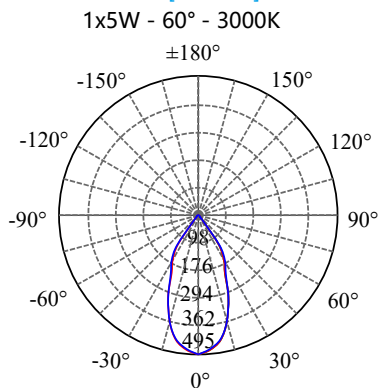

• **PERFORMANCE**

- 1x5W - 36V - 150mA - 554lm
- 1x10W - 36V - 250mA - 1112lm