



- Aluminium housing with corrosion resistant powdercoat
- 4mm thick PMMA diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3 years

- **CODE - IP65**    **COLOR**  
BLRDLB2060    BLACK  
BLRDLG2060    GREY


**POWER:**1x20/30W

- **CODE - IP65**    **COLOR**  
BLRDLB20100    BLACK  
BLRDLG20100    GREY

**POWER:**1x20/30W

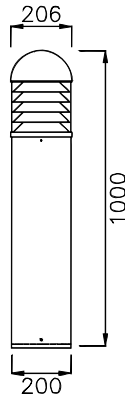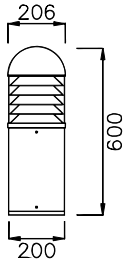

• **PHOTOMETRIC [Unit::cd]**

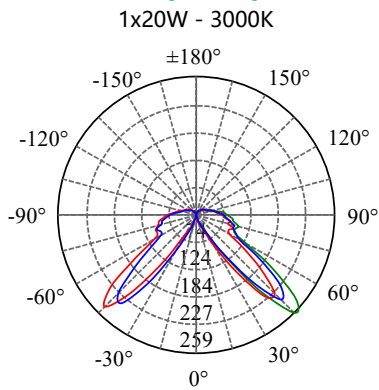

• **PERFORMANCE**

1x20W - 36V - 500mA - 1185lm  
1x30W - 36V - 750mA - 1783lm