


- Aluminium housing with corrosion resistant powdercoat
- 3mm toughened glass diffuser
- Cut out :  $\Phi 110-115\text{mm}$
- CE/SAA/IP20/IP65
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI $\geq 80/90$
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20**      **COLOR**  
DLRB12072520    BLACK  
DLRW12072520    WHITE




**POWER:** 1x10/15/20/25W

- **CODE - IP65**      **COLOR**  
DLRB12072565    BLACK  
DLRW12072565    WHITE

**POWER:** 1x10/15/20/25W

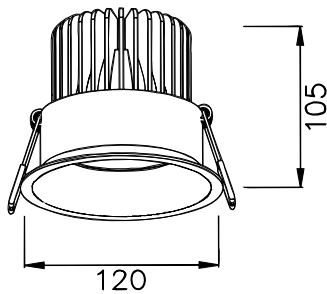

- **PHOTOMETRIC [Unit:: cd]**

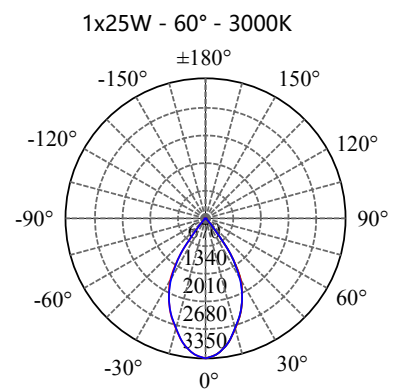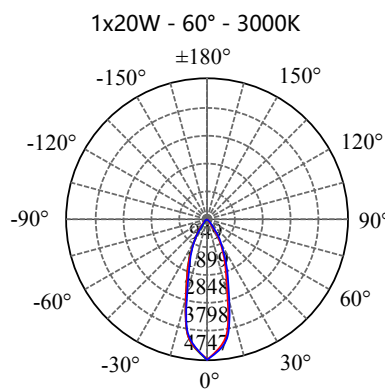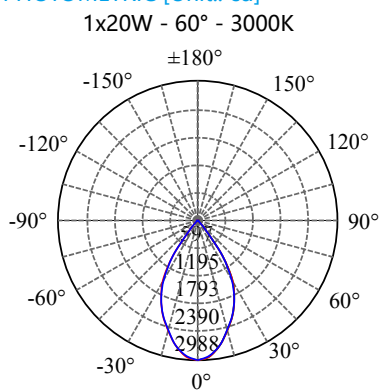

- **PERFORMANCE**

1x10W - 36V - 250mA - 1182lm  
 1x15W - 36V - 350mA - 1743lm  
 1x20W - 36V - 500mA - 2385lm  
 1x25W - 36V - 650mA - 2756lm