



- Aluminium housing with corrosion resistant powdercoat
- 3mm toughened glass diffuser
- CE/SAA/IP20/IP65/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20** **COLOR**
- PDRBB101520 BLACK
- PDRBW101520 WHITE
- POWER:** 1x5/10/15W




- **CODE - IP20** **COLOR**
- PDRBB102020 BLACK
- PDRBW102020 WHITE
- POWER:** 1x5/10/15W

- **CODE - IP20** **COLOR**
- PDRBB103020 BLACK
- PDRBW103020 WHITE
- POWER:** 1x5/10/15W



- **CODE - IP65** **COLOR**
- PDRBB101565 BLACK
- PDRBW101565 WHITE
- POWER:** 1x5/10/15W

- **CODE - IP65** **COLOR**
- PDRBB102065 BLACK
- PDRBW102065 WHITE
- POWER:** 1x5/10/15W

- **CODE - IP65** **COLOR**
- PDRBB103065 BLACK
- PDRBW103065 WHITE
- POWER:** 1x5/10/15W

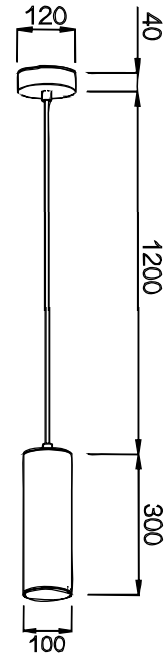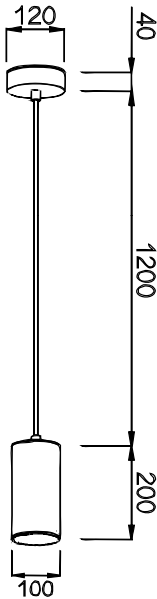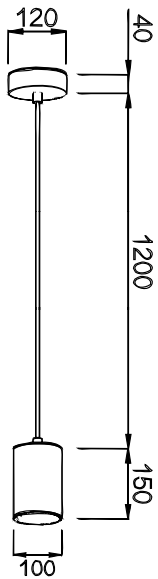

• **PHOTOMETRIC [Unit: cd]**

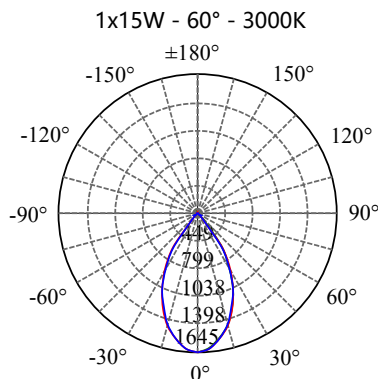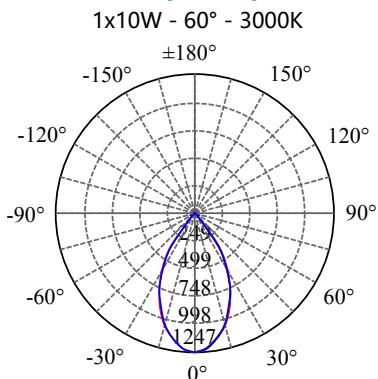

• **PERFORMANCE**

- 1x5W - 36V - 150mA - 577lm
- 1x10W - 36V - 250mA - 1152lm
- 1x15W - 36V - 350mA - 1725lm