

- Aluminium housing with corrosion resistant powdercoat
- 8mm thick toughened FLUSH glass diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3 years

• **CODE - IP65**    **COLOR**



BLRDPB2060    BLACK  
BLRDPG2060    GREY

**POWER:**1x20/30W

• **CODE - IP65**    **COLOR**


BLRDPB20100    BLACK  
BLRDPG20100    GREY

**POWER:**1x20/30W

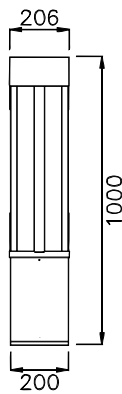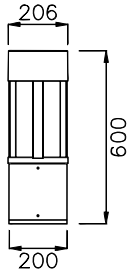

• **PHOTOMETRIC [Unit::cd]**

1x20W - 3000K

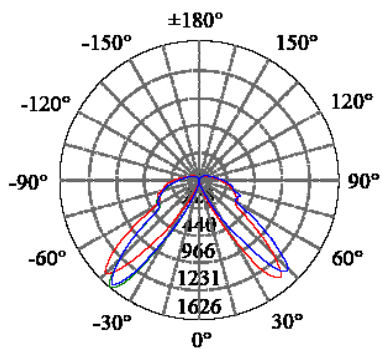

• **PERFORMANCE**

1x20W - 36V - 500mA - 1825lm  
1x30W - 36V - 750mA - 2738lm