



- Aluminium housing with corrosion resistant powdercoat
- 3mm toughened glass diffuser
- CE/SAA/IP20/IP65/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Beam Angle: 12°/24°/36°/60°
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3/5 years

- **CODE - IP20** **COLOR**
PDRBB151520 BLACK
PDRBW151520 WHITE
POWER: 1x15/20W





- **CODE - IP20** **COLOR**
PDRBB152020 BLACK
PDRBW152020 WHITE
POWER: 1x15/20/30W

- **CODE - IP20** **COLOR**
PDRBB153020 BLACK
PDRBW153020 WHITE
POWER: 1x15/20/30W

- **CODE - IP65** **COLOR**
PDRBB151565 BLACK
PDRBW151565 WHITE
POWER: 1x15/20W

- **CODE - IP65** **COLOR**
PDRBB152065 BLACK
PDRBW152065 WHITE
POWER: 1x15/20/30W

- **CODE - IP65** **COLOR**
PDRBB153065 BLACK
PDRBW153065 WHITE
POWER: 1x15/20/30W

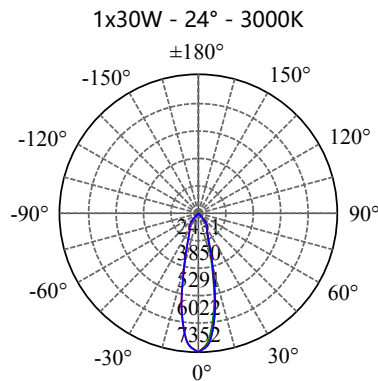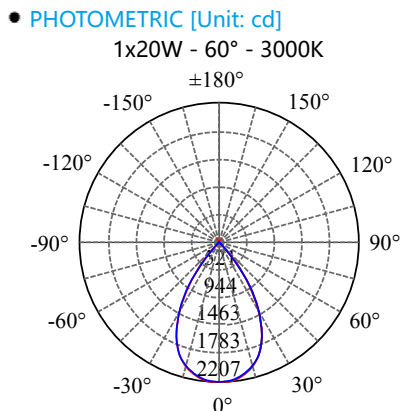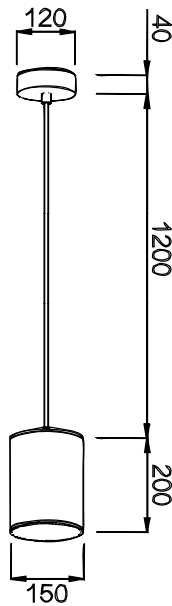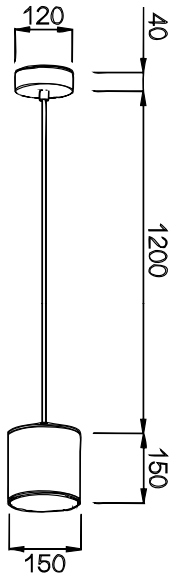

- **PERFORMANCE**
1x15W - 36V - 350mA - 1723lm
1x20W - 36V - 500mA - 2335lm
1x30W - 36V - 750mA - 3508lm