






- 316L# SS housing
- 10mm thick toughen FLUSH glass diffuser
- PC pre-buried bucket
- CE/SAA/IP66/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3 years

- **CODE - IP66 COLOR**
IGRSSB1813 BRUSHED

POWER: 1x10/15W

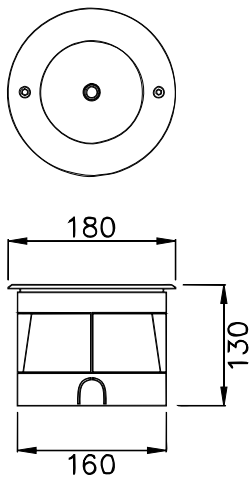

- **PHOTOMETRIC [Unit: cd]**

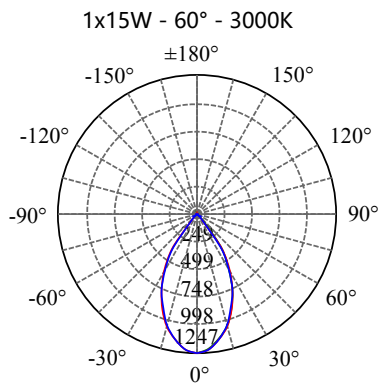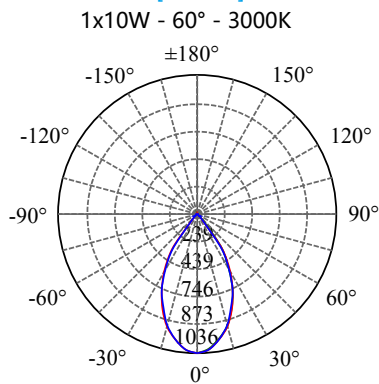

- **PERFORMANCE**

1x10W - 36V - 250mA - 1054lm
1x15W - 36V - 350mA - 1556lm