



- Aluminium housing with corrosion resistant powdercoat
- 4mm thick PMMA diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3 years

- **CODE - IP65** **COLOR**
 BLRFLB2060 BLACK
 BLRFLG2060 GREY


POWER:1x20/30W

- **CODE - IP65** **COLOR**
 BLRFLB20100 BLACK
 BLRFLG20100 GREY

POWER:1x20/30W

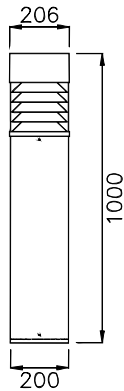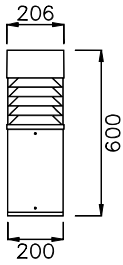

• **PHOTOMETRIC [Unit::cd]**

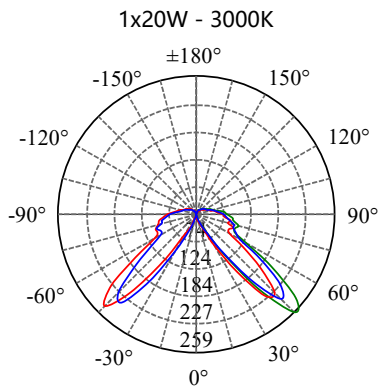

• **PERFORMANCE**

- 1x20W - 36V - 500mA - 1185lm
- 1x30W - 36V - 750mA - 1783m