





- Aluminium housing with corrosion resistant powdercoat
- 8mm thick toughened FLUSH glass diffuser
- CE/SAA/IP65/IK08/Class 1
- CREE/Bridgelux COB: 3000K/4000K/6000K/CRI≥80/90
- Input: 220-240Vac/WT:-20~+50° C
- Warranty: 3 years

- **CODE - IP65** **COLOR**
- BLRADJB1560 BLACK
- BLRADJG1560 GREY
- POWER:**1x15/20/30W

- **CODE - IP65** **COLOR**
- BLRADJB15100 BLACK
- BLRADJG15100 GREY
- POWER:**1x15/20/30W

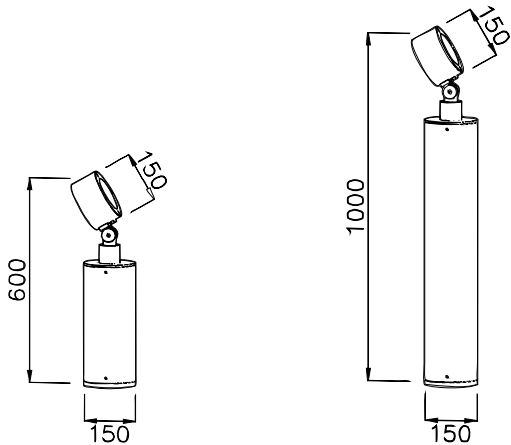

• **PHOTOMETRIC [Unit: cd]**

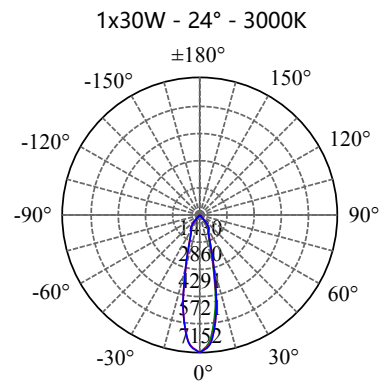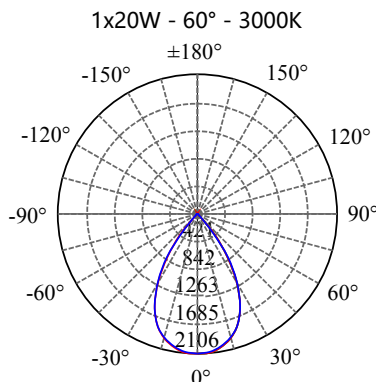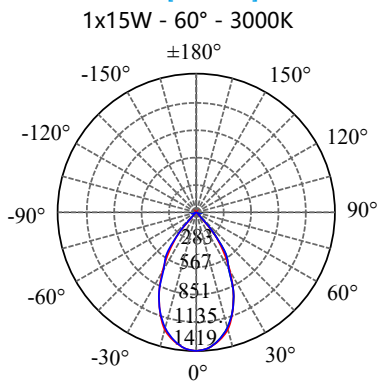

• **PERFORMANCE**

- 1x15W - 36V - 350mA - 1556lm
- 1x20W - 36V - 500mA - 2039m
- 1x30W - 36V - 750mA - 3058lm